

2025 | *MULTI V*TM

2025
*MULTI V*TM

LG HVAC
SOLUTION



LG Electronics

<http://www.lg.com>
<http://partner.lge.com>

Copyright © 2025 LG Electronics. All rights reserved.

Distributed by



Life's Good.



INDOOR UNITS

Wall mounted	126
Ceiling mounted cassette	140
Ceiling mounted round cassette	160
Ceiling concealed duct	164
Fresh air intake	177
Ceiling suspended	180
Console & floor standing	184
Floor standing (PAC)	191
Compatibility & feature functions	194



Features & Benefits

- 6 Different discharge angles can be programmed via the remote controller.
- Easily detachable full surface cover helps to clean the air conditioner.
- Drain pipe can be easily hidden from sight.

Key Applications

- Retail
- Hotel
- Restaurant
- Multi-family Residence
- Office

WALL MOUNTED		ARTCOOL MIRROR	ARTCOOL GALLERY	STANDARD
Smart	Wi-Fi	○	○	○
Energy Efficiency	Energy Display	○	○	○
Fast Cooling & Heating	Jet Cool	○	○	○
	Auto Swing (Up & Down)	○	○	○
Health	Ionizer	○	-	○ ~7.1kW Only
	Pre Filter	○	○	○
	Auto Cleaning	○	○	○
Comfort	Sleep Mode	○	○	○
	Timer (On / Off)	○	○	○
	Timer (Weekly)	○	○	○
	Two Thermistor Control	○	○	○
	Group Control	○	○	○

※ ○: Applied, - : Not applied

Wi-Fi Control

Anytime, anywhere access to the unit with Android & iOS-based smartphones.

ThinQ

Search “ThinQ” on Google market or the App Store to download the app.


Integrated Home Appliances Control

Control / Monitor all your LG appliances from one place.



Easy Registration and Log-in

Follow the easy set-up steps that will activate ThinQ's user-friendly features.

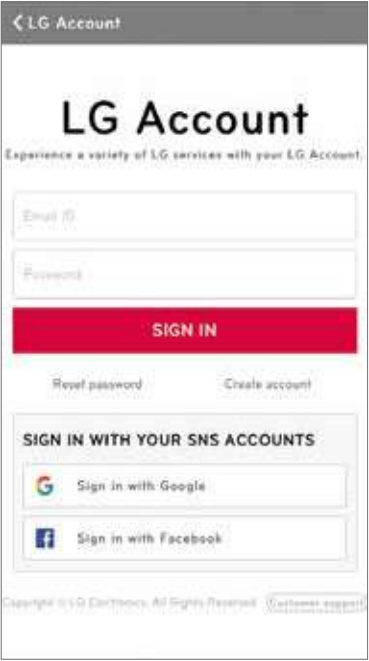


Simple Operation for Various Functions



On / Off, Current Temp



Mode, Set Temp



Vane Control

Straight forward Management



Energy Monitoring



Smart Diagnosis



Filter Management



Reservation

※ For our policy of continuous ThinQ App improvement, specification, design and features are subject to change without prior notice.

Wi-Fi Control

Anytime, anywhere access to the unit with Android & iOS-based smartphones.

ThinQ

Search "ThinQ" on Google market or the App Store to download the app.

Access your air conditioner anytime and from anywhere

with a Wi-Fi equipped device and LG's exclusive control app, ThinQ.



Wi-Fi Connectivity

Each user can set and save temperature and fan speed preferences in the ThinQ app. If a household has more than one indoor unit, separate temperature settings can be set for each.

Multiple Devices



※ Can be controlled by multiple users, but not simultaneously.

Multi-Control



※ For our policy of continuous ThinQ App improvement, specification, design and features are subject to change without prior notice.


Ionizer^{PLUS}

The powerful Ionizer protects you from bad odors and Escherichia coli and Staphylococcus in the surface with over 8 million ions that ensure a safer, and cleaner environment.

※ Specifications may vary for each model.
※ Depending on the experimental conditions.


Reduction and Deodorization (Utilizes Over 8 Million Ions)

Ionizer+ reduces E.coli and Staphylococcus in the surface with over 8 million ions.

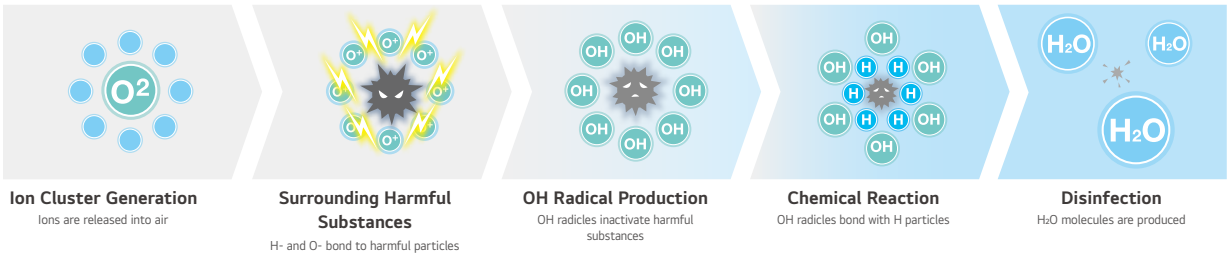

Reduction Performance Evaluations

Reduce Bacteria E.coli by over 99.9% in 20 min, and staphylococcus by over 99.9% in 60min.

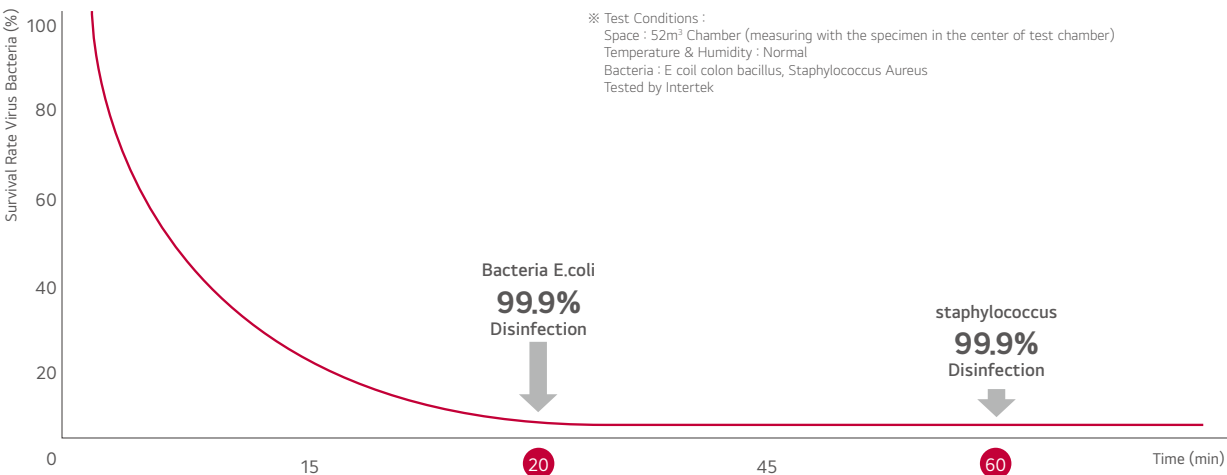

2.1 odor strength decrease in 60 minutes

An odor measured as 2 European odor units (ouE/m³) or less indicates that the level of odor falls within permissible limits.

Odor Strength	1	2	3	4
Offensive odor substance sensitivity	 Mountain smell	 Indoor life smell	 Bathroom smell	 Food waste smell
Odor strength level	Light	Moderate	Strong	Very Strong



Odor strength reduce 3.6 → 1.5 / The Odor floating in the room as well as curtains and clothes.

※ Test conditions : Space: 8m³ Chamber
Temperature & Humidity : Normal
Tested by Intertek

Auto Cleaning

The unit has a self-cleaning function that dries the heat exchanger before cleaning the interior.


Pain Point

The main cause of odor within air conditioners is mold and bacteria growing on the heat exchanger. These germs can spread when the heat exchanger is wet.




Cleans Filter with Regular Airflow

The comprehensive auto cleaning function prevents the formation of bacteria and mold on the heat exchanger.

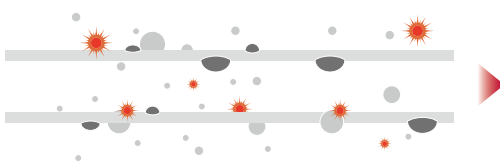

By dehumidifying, (+ionizing with some models), the auto cleaning function prevents potentially harmful substances from forming on the surface of the heat exchanger.

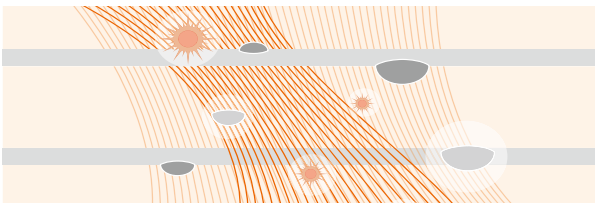


The indoor environment remains odorless with the advanced deodorizing function.



By preventing pollution of the heat exchanger caused by various germs and bacteria, performance and lifespan of the air conditioner can be increased by 10 years.

Installation Support Clip

A support clip creates adequate space between the wall and the unit for easier installation.

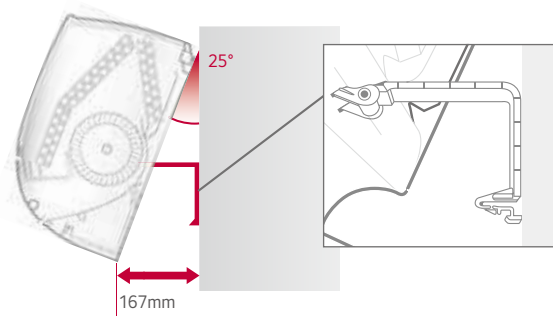


Auto Swing

Cool air extends to the entire room regardless of where the unit is situated.

※ Specifications may vary for each model.

6-Step Vane Control Up to 70°


The vertical vane, which moves up and down, has 6 different settings including full-auto swing.

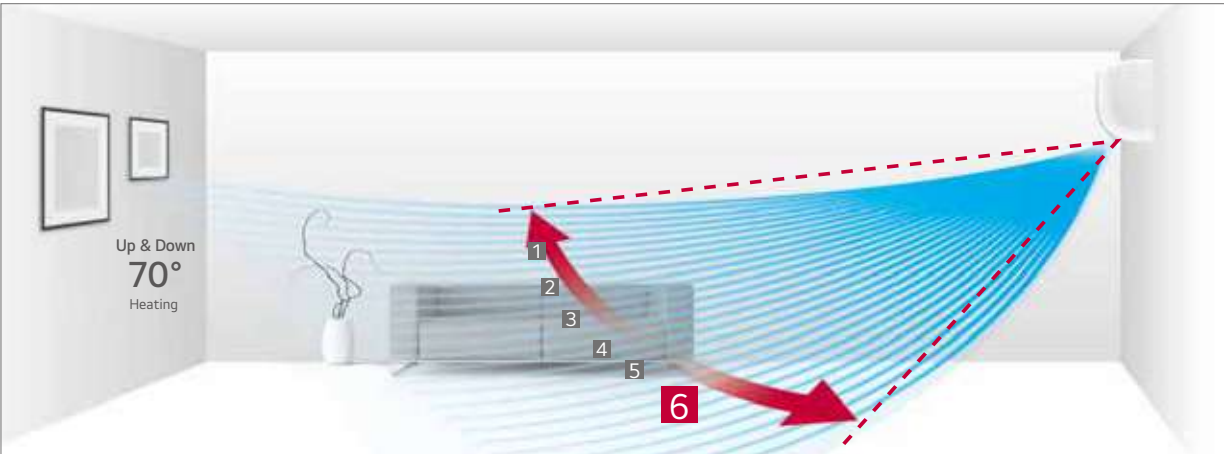

※ Angle can be different from each model and working mode.

Control Up to 110°

Louver can be adjusted manually to extend left and right swing to 110 degrees.

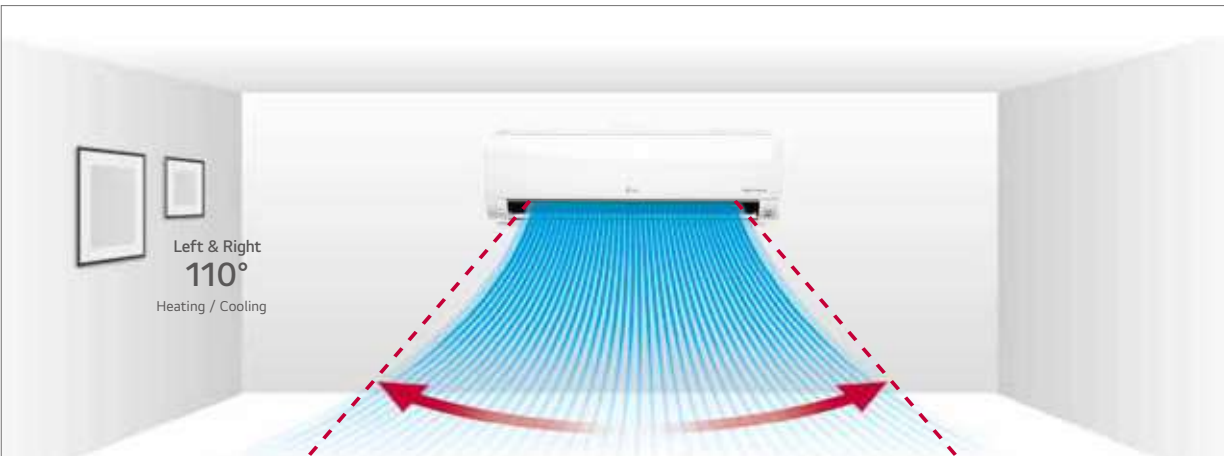

※ Angle can be different from each model and working mode.

Easy and Simple Control

Airflow direction can be changed by ThinQ Wi-Fi app.

※ For our policy of continuous ThinQ App improvement, specification, design and features are subject to change without prior notice.




Jet Cool

LG air conditioners provide optimized high-speed airflow, which can cool rooms faster while delivering cool air evenly in every direction.

※ Specifications may vary for each model.
※ Depending on the experimental conditions.

One Click “Jet Mode”

Reduces the temperature of outflowing air to 18°C for 30 minutes with just one click.

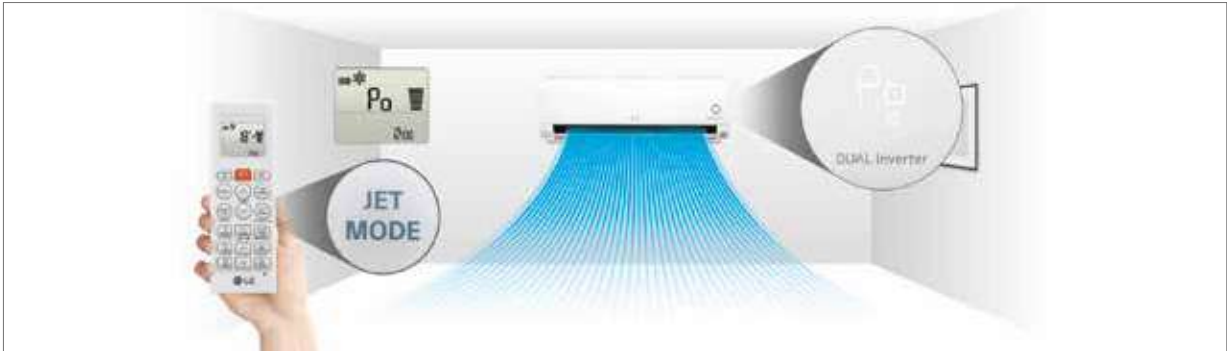

More Powerful Performance


By reducing the second vortex, which decreases airflow within the air outlet, and enlarging the fan size, the amount of air flow is increased to 13 CMM.



Scheduled Operation

You can set the daily temperature, fan speed, the operation mode and automatic On / Off time for two weeks. It will keep running on that time until cancelled by the user.

※ This function is for wired remote controller only.
※ Wired remote controller is need to be separately purchased.

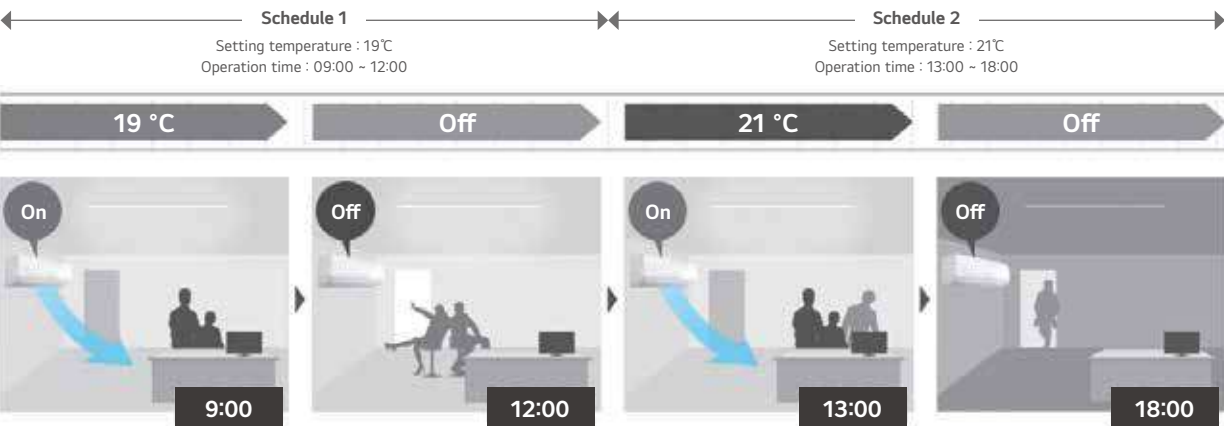

Two Thermistors Control

The indoor temperature can be checked using the thermistors in the remote controller as well as from the indoor unit. There may be a significant difference between ceiling and floor air temperature. Two thermistors can optimise indoor air temperature for a more comfortable environment.



Group Control

The group control from the remote controller (PREMTB101 / PREMTBB11) has more functions than the previous model.



ARNU05GSJR4 / ARNU07GSJR4
ARNU09GSJR4 / ARNU12GSJR4
ARNU15GSJR4



MODEL		UNIT	ARNU05GSJR4	ARNU07GSJR4	ARNU09GSJR4	ARNU12GSJR4	ARNU15GSJR4
Cooling Capacity		kW	1.6	2.2	2.8	3.6	4.5
Heating Capacity		kW	1.8	2.5	3.2	4.0	5.0
Power Input (H / M / L)	Nominal	W	11 / 10 / 9	12 / 11 / 9	13 / 12 / 9	15 / 13 / 11	23 / 18 / 11
	Exterior Color	-	Mirror (Black)	Mirror (Black)	Mirror (Black)	Mirror (Black)	Mirror (Black)
RAL Code		-	RAL 9005	RAL 9005	RAL 9005	RAL 9005	RAL 9005
Dimensions (W x H x D)	Body	mm	837 x 308 x 192	837 x 308 x 192	837 x 308 x 192	837 x 308 x 192	837 x 308 x 192
	Shipping	mm	892 x 381 x 249	892 x 381 x 249	892 x 381 x 249	892 x 381 x 249	892 x 381 x 249
Fan	Type	-	Cross Flow Fan	Cross Flow Fan	Cross Flow Fan	Cross Flow Fan	Cross Flow Fan
	Motor Output x Number	W x No.	30 x 1	30 x 1	30 x 1	30 x 1	30 x 1
	Air Flow Rate (H / M / L)	m³/min	6.8 / 6.5 / 5.9	7.2 / 6.8 / 5.9	7.8 / 7.2 / 5.9	8.5 / 7.8 / 6.8	10.5 / 9.5 / 6.8
	Motor Type	-	BLDC	BLDC	BLDC	BLDC	BLDC
Air Filter		-	Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø16 (5/8)	Ø16 (5/8)	Ø16 (5/8)	Ø16 (5/8)	Ø16 (5/8)
Weight	Body	kg	9.2	9.2	9.2	9.2	9.2
Sound Pressure Levels (H / M / L)		dB(A)	30 / 29 / 28	32 / 30 / 28	34 / 32 / 28	37 / 34 / 30	42 / 39 / 32
Sound Power Levels (H / M / L)		dB(A)	45 / 43 / 42	46 / 45 / 42	48 / 46 / 42	51 / 48 / 45	55 / 52 / 44
Power Supply		V / Ø / Hz	220-230-240 / 1 / 50-60	220-230-240 / 1 / 50-60	220-230-240 / 1 / 50-60	220-230-240 / 1 / 50-60	220-230-240 / 1 / 50-60
Transmission Cable		mm²	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

Note :
1. Performance tested under EN14511
2. Capacities are based on the following conditions
- Cooling : Indoor temp. 27℃ (80.6°F) DB / 19℃ (66.2°F) WB, Outdoor temp. 35℃ (95°F) DB / 24℃ (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20℃ (68°F) DB / 15℃ (59°F) WB, Outdoor temp. 7℃ (44.6°F) DB / 6℃ (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification

Accessories

CHASSIS	ARNU05GSJR4	ARNU07GSJR4	ARNU09GSJR4	ARNU12GSJR4	ARNU15GSJR4
Drain Pump	-				
Cassette Cover	-				
Refrigerant Leak Detector	PRLDNVSO (R410A), PLDRNV1S (R32)				
EEV Kit	PRGK024A0				
Multi-tenant Power Module	PINPMB001				
Robot Cleaner	-				
Pre Filter (Washable)	○				
Ion Generator	○				
CO ₂ Sensor	-				
Ventilation Kit	-				
IR Receiver	-				
Zone Controller	-				
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)				
External Input (1 point)	○				
Wi-Fi	○				

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

ARNU18GSKR4 / ARNU24GSKR4



MODEL		UNIT	ARNU18GSKR4	ARNU24GSKR4
Cooling Capacity		kW	5.6	7.1
Heating Capacity		kW	6.3	7.5
Power Input (H / M / L)	Nominal	W	32 / 26 / 16	39 / 26 / 16
	Exterior Color	-	Mirror (Black)	Mirror (Black)
RAL Code		-	RAL 9005	RAL 9005
Dimensions (W x H x D)	Body	mm	998 x 345 x 212	998 x 345 x 212
	Shipping	mm	1,063 x 420 x 274	1,063 x 420 x 274
Fan	Type	-	Cross Flow Fan	Cross Flow Fan
	Motor Output x Number	W x No.	58 x 1	58 x 1
	Air Flow Rate (H / M / L)	m³/min	14.0 / 12.0 / 10.5	15.2 / 12.7 / 10.5
	Motor Type	-	BLDC	BLDC
Air Filter		-	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø16 (5/8)	Ø16 (5/8)
Weight	Body	kg	13.4	13.4
Sound Pressure Levels (H / M / L)		dB(A)	43 / 39 / 34	46 / 41 / 34
Sound Power Levels (H / M / L)		dB(A)	59 / 56 / 52	63 / 58 / 52
Power Supply		V / Ø / Hz	220-230-240 / 1 / 50-60	220-230-240 / 1 / 50-60
Transmission Cable		mm²	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

Note :
1. Performance tested under EN14511
2. Capacities are based on the following conditions
- Cooling : Indoor temp. 27℃ (80.6°F) DB / 19℃ (66.2°F) WB, Outdoor temp. 35℃ (95°F) DB / 24℃ (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20℃ (68°F) DB / 15℃ (59°F) WB, Outdoor temp. 7℃ (44.6°F) DB / 6℃ (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification

Accessories

CHASSIS	ARNU18GSKR4	ARNU24GSKR4
Drain Pump	-	
Cassette Cover	-	
Refrigerant Leak Detector	PRLDNVSO (R410A), PLDRNV1S (R32)	
EEV Kit	PRGK024A0	
Multi-tenant Power Module	PINPMB001	
Robot Cleaner	-	
Pre Filter (Washable)	○	
Ion Generator	○	
CO ₂ Sensor	-	
Ventilation Kit	-	
IR Receiver	-	
Zone Controller	-	
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 point)	○	
Wi-Fi	○	

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

ARNU07GSF14 / ARNU09GSF14
ARNU12GSF14



MODEL		UNIT	ARNU07GSF14	ARNU09GSF14	ARNU12GSF14
Cooling Capacity		kW	2.2	2.8	3.6
Heating Capacity		kW	2.5	3.2	4.0
Power Input (H / M / L)	Nominal	W	28 / 16 / 10	28 / 16 / 10	32 / 20 / 12
Dimensions (W x H x D)	Body	mm	600 x 600 x 146	600 x 600 x 146	600 x 600 x 146
	Shipping	mm	685 x 670 x 215	685 x 670 x 215	685 x 670 x 215
Fan	Type	-	Turbo Fan	Turbo Fan	Turbo Fan
	Motor Output x Number	W x No.	30 x 1	30 x 1	30 x 1
	Air Flow Rate (H / M / L)	m³/min	8.1 / 6.3 / 4.2	8.1 / 6.3 / 4.2	9.3 / 7.7 / 6.0
	Motor Type	-	BLDC	BLDC	BLDC
Air Filter		-	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø12.2 (15/32)	Ø12.2 (15/32)	Ø12.2 (15/32)
Weight	Body	kg	15.4	15.4	15.4
Sound Pressure Levels (H / M / L)		dB(A)	38 / 32 / 27	38 / 32 / 27	44 / 38 / 32
Sound Power Levels (H / M / L)		dB(A)	48 / 46 / 41	48 / 46 / 41	54 / 48 / 42
Power Supply		V / Ø / Hz	220-230-240 / 1 / 50-60	220-230-240 / 1 / 50-60	220-230-240 / 1 / 50-60
Transmission Cable		mm²	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

Note :
1. Performance tested under EN14511
2. Capacities are based on the following conditions
- Cooling : Indoor temp. 27℃ (80.6℉) DB / 19℃ (66.2℉) WB, Outdoor temp. 35℃ (95℉) DB / 24℃ (75.2℉) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20℃ (68℉) DB / 15℃ (59℉) WB, Outdoor temp. 7℃ (44.6℉) DB / 6℃ (42.8℉) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification

Accessories

CHASSIS	ARNU07GSF14	ARNU09GSF14	ARNU12GSF14
Drain Pump		-	
Cassette Cover		-	
Refrigerant Leak Detector		PRLDNVS0 (R410A)	
EEV Kit		PRGK024A0	
Multi-tenant Power Module		PINPMB001	
Robot Cleaner		-	
Pre Filter (Washable)		○	
Ion Generator		-	
CO ₂ Sensor		-	
Ventilation Kit		-	
IR Receiver		-	
Zone Controller		-	
Dry Contact (with additional accessory)		PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 point)		○	
Wi-Fi		PWFMD200 ¹⁾	

※ ○ : Applied, - : Not applied
Option : Refer to model name in table
1) External installation only

ARNU05GSJ*4 / ARNU07GSJ*4 / ARNU09GSJ*4
ARNU12GSJ*4 / ARNU15GSJ*4



MODEL		UNIT	ARNU05GSJ*4	ARNU07GSJ*4	ARNU09GSJ*4	ARNU12GSJ*4	ARNU15GSJ*4
Cooling Capacity		kW	1.6	2.2	2.8	3.6	4.5
Heating Capacity		kW	1.8	2.5	3.2	4.0	5.0
Power Input (H / M / L)	Nominal	W	11 / 10 / 9	12 / 11 / 9	13 / 12 / 9	15 / 13 / 11	23 / 18 / 11
Exterior Color		-	White	White	White	White	White
RAL Code		-	RAL 9016	RAL 9016	RAL 9016	RAL 9016	RAL 9016
Dimensions (W x H x D)	Body	mm	818 x 316 x 189	818 x 316 x 189	818 x 316 x 189	818 x 316 x 189	818 x 316 x 189
	Shipping	mm	892 x 381 x 249	892 x 381 x 249	892 x 381 x 249	892 x 381 x 249	892 x 381 x 249
Fan	Type	-	Cross Flow Fan	Cross Flow Fan	Cross Flow Fan	Cross Flow Fan	Cross Flow Fan
	Motor Output x Number	W x No.	30 x 1	30 x 1	30 x 1	30 x 1	30 x 1
	Air Flow Rate (H / M / L)	m³/min	6.8 / 6.5 / 5.9	7.2 / 6.8 / 5.9	7.8 / 7.2 / 5.9	8.5 / 7.8 / 6.8	10.5 / 9.5 / 6.8
	Motor Type	-	BLDC	BLDC	BLDC	BLDC	BLDC
Air Filter		-	Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø16 (5/8)	Ø16 (5/8)	Ø16 (5/8)	Ø16 (5/8)	Ø16 (5/8)
Weight	Body	kg	8.4	8.4	8.4	8.4	8.4
Sound Pressure Levels (H / M / L)		dB(A)	30 / 29 / 28	32 / 30 / 28	34 / 32 / 28	37 / 34 / 30	42 / 39 / 32
Sound Power Levels (H / M / L)		dB(A)	45 / 43 / 42	46 / 45 / 42	48 / 46 / 42	51 / 48 / 45	55 / 52 / 45
Power Supply		V / Ø / Hz	220-230-240 / 1 / 50-60	220-230-240 / 1 / 50-60	220-230-240 / 1 / 50-60	220-230-240 / 1 / 50-60	220-230-240 / 1 / 50-60
Transmission Cable		mm²	1.0 ~ 1.5 × 2C	1.0 ~ 1.5 × 2C	1.0 ~ 1.5 × 2C	1.0 ~ 1.5 × 2C	1.0 ~ 1.5 × 2C

* : N or C can be applied which has little bit different shape of panel.
Note :
1. Performance tested under EN14511
2. Capacities are based on the following conditions
- Cooling : Indoor temp. 27℃ (80.6℉) DB / 19℃ (66.2℉) WB, Outdoor temp. 35℃ (95℉) DB / 24℃ (75.2℉) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20℃ (68℉) DB / 15℃ (59℉) WB, Outdoor temp. 7℃ (44.6℉) DB / 6℃ (42.8℉) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification

Accessories

CHASSIS	ARNU05GSJ*4	ARNU07GSJ*4	ARNU09GSJ*4	ARNU12GSJ*4	ARNU15GSJ*4
Drain Pump			-		
Cassette Cover			-		
Refrigerant Leak Detector			PRLDNVS0 (R410A), PLDRNV1S (R32)		
EEV Kit			PRGK024A0		
Multi-tenant Power Module			PINPMB001		
Robot Cleaner			-		
Pre Filter (Washable)			○		
Ion Generator			○		
CO ₂ Sensor			-		
Ventilation Kit			-		
IR Receiver			-		
Zone Controller			-		
Dry Contact (with additional accessory)			PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)		
External Input (1 point)			○		
Wi-Fi			○		

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

ARNU18GSK*4 / ARNU24GSK*4



MODEL		UNIT	ARNU18GSK*4	ARNU24GSK*4
Cooling Capacity		kW	5.6	7.1
Heating Capacity		kW	6.3	7.5
Power Input (H / M / L)	Nominal	W	32 / 26 / 16	39 / 26 / 16
Exterior Color		-	White	White
RAL Code		-	RAL 9016	RAL 9016
Dimensions (W x H x D)	Body	mm	975 x 354 x 209	975 x 354 x 209
	Shipping	mm	1,063 x 420 x 274	1,063 x 420 x 274
Fan	Type	-	Cross Flow Fan	Cross Flow Fan
	Motor Output x Number	W x No.	58 x 1	58 x 1
	Air Flow Rate (H / M / L)	m³/min	14.0 / 12.0 / 10.5	15.2 / 12.7 / 10.5
	Motor Type	-	BLDC	BLDC
Air Filter		-	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø16 (5/8)	Ø16 (5/8)
Weight	Body	kg	12.2	12.2
Sound Pressure Levels (H / M / L)		dB(A)	43 / 39 / 34	46 / 41 / 34
Sound Power Levels (H / M / L)		dB(A)	59 / 56 / 52	63 / 56 / 52
Power Supply		V / Ø / Hz	220-230-240 / 1 / 50-60	220-230-240 / 1 / 50-60
Transmission Cable		mm²	1.0 ~ 1.5 × 2C	1.0 ~ 1.5 × 2C

* : N or C can be applied which has little bit different shape of panel.
Note :
1. Performance tested under EN14511
2. Capacities are based on the following conditions
- Cooling : Indoor temp. 27℃ (80.6°F) DB / 19℃ (66.2°F) WB, Outdoor temp. 35℃ (95°F) DB / 24℃ (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20℃ (68°F) DB / 15℃ (59°F) WB, Outdoor temp. 7℃ (44.6°F) DB / 6℃ (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification

Accessories

CHASSIS	ARNU18GSK*4	ARNU24GSK*4
Drain Pump		-
Cassette Cover		-
Refrigerant Leak Detector	PRLDNVS0 (R410A), PLDRNV1S (R32)	
EEV Kit	PRGK024A0	
Multi-tenant Power Module	PINPMB001	
Robot Cleaner		-
Pre Filter (Washable)		○
Ion Generator		○
CO ₂ Sensor		-
Ventilation Kit		-
IR Receiver		-
Zone Controller		-
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 point)		○
Wi-Fi		○

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

ARNU30GSRA4 / ARNU36GSRA4



MODEL		UNIT	ARNU30GSRA4	ARNU36GSRA4
Cooling Capacity		kW	8.8	10.4
Heating Capacity		kW	9.4	10.8
Power Input (H / M / L)	Nominal	W	47.0 / 42.0 / 36.0	65.0 / 47.0 / 42.0
Exterior Color		-	Magic White	Magic White
RAL Code		-	RAL 9016	RAL 9016
Dimensions (W x H x D)	Body	mm	1,200 x 360 x 265	1,200 x 360 x 265
	Shipping	mm	1,280 x 360 x 455	1,280 x 360 x 455
Fan	Type	-	Cross Flow Fan	Cross Flow Fan
	Motor Output x Number	W x No.	113 x 1	113 x 1
	Air Flow Rate (H / M / L)	m³/min	21.0 / 17.0 / 13.0	25.0 / 21.0 / 17.0
	Motor Type	-	BLDC	BLDC
Air Filter		-	Pre-Filter	Pre-Filter
Pipe Connections	Liquid Side	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø14.5 (9/16)	Ø14.5 (9/16)
Weight	Body	kg	16.6	16.6
Sound Pressure Levels (H / M / L)		dB(A)	46.0 / 42.0 / 38.0	51.0 / 46.0 / 42.0
Sound Power Levels (H / M / L)		dB(A)	60.0 / 55.0 / 50.0	63.0 / 60.0 / 55.0
Power Supply		V / Ø / Hz	220 - 240, 1, 50 - 60	220 - 240, 1, 50 - 60
Transmission Cable		mm²	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

Note :
1. Performance tested under EN14511
2. Capacities are based on the following conditions
- Cooling : Indoor temp. 27℃ (80.6°F) DB / 19℃ (66.2°F) WB, Outdoor temp. 35℃ (95°F) DB / 24℃ (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20℃ (68°F) DB / 15℃ (59°F) WB, Outdoor temp. 7℃ (44.6°F) DB / 6℃ (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification

Accessories

CHASSIS	ARNU30GSRA4	ARNU36GSRA4
Drain Pump		-
Cassette Cover		-
Refrigerant Leak Detector	PRLDNVS0 (R410A), PLDRNV1S (R32)	
EEV Kit		
Multi-tenant Power Module	PINPMB001	
Robot Cleaner		-
Pre Filter (Washable)		○
Ion Generator		-
CO ₂ Sensor		-
Ventilation Kit		-
IR Receiver		-
Zone Controller		-
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 point)		○
Wi-Fi		○

※ ○ : Applied, - : Not applied
Option : Refer to model name in table
1) External installation only



Features & Benefits

- New dual vane 4 Way cassette allows comfortable air flow
- Full 3D Turbo fan decreases air resistance, providing high air flow and low sound levels.

Key Applications

- Retail
- School
- Office
- Hotel
- Dormitory
- Restaurant

CASSETTE		4 WAY	2 WAY	1 WAY
Smart	Wi-Fi	○	○	○
Energy Efficiency	Human Detect Sensor	○	-	-
Comfort	Drain Pump	○	○	○
	Sleep Mode	○	○	○
	Timer (On / Off)	○	○	○
	Timer (Weekly)	○	○	○
	Two Thermistor Control	○	○	○
Group Control		○	○	○


※ ○: Applied, - : Not applied

4 Way Air Flow with New Design


New 4 Way dual vane design promotes comfortable and convenient airflow.



New wind types

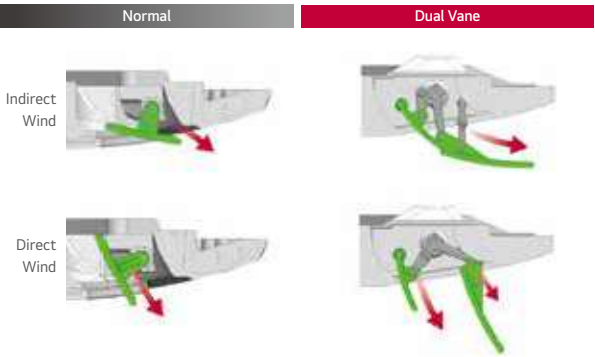

6 Airflow mode

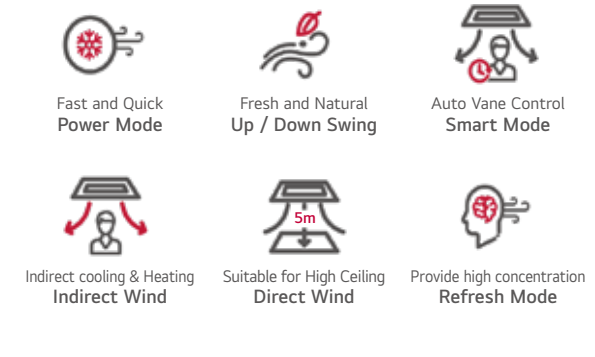


Brighter Color

Color enhancement allows the cassette to blend in to most interior ceiling spaces.



Wide Design

Bigger inlet and outlet allows for faster cooling / heating airflow.

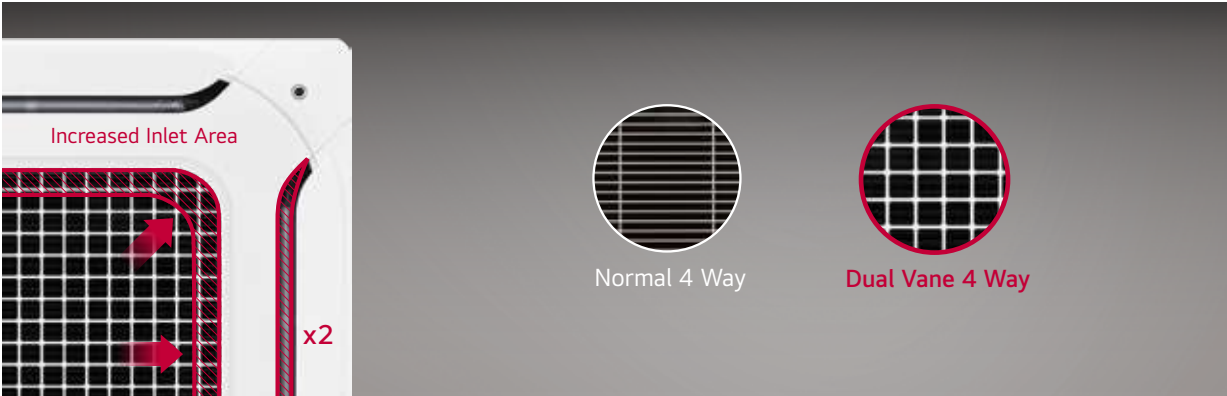


Full 3D Turbo Fan

Full 3D Turbo fan decreases air resistance, creating high efficiency and reducing noise level.



High Efficiency Heat Exchanger (HEX)

Ø5 High Density Heat Exchanger increases cooling / heating efficiency by 10%.

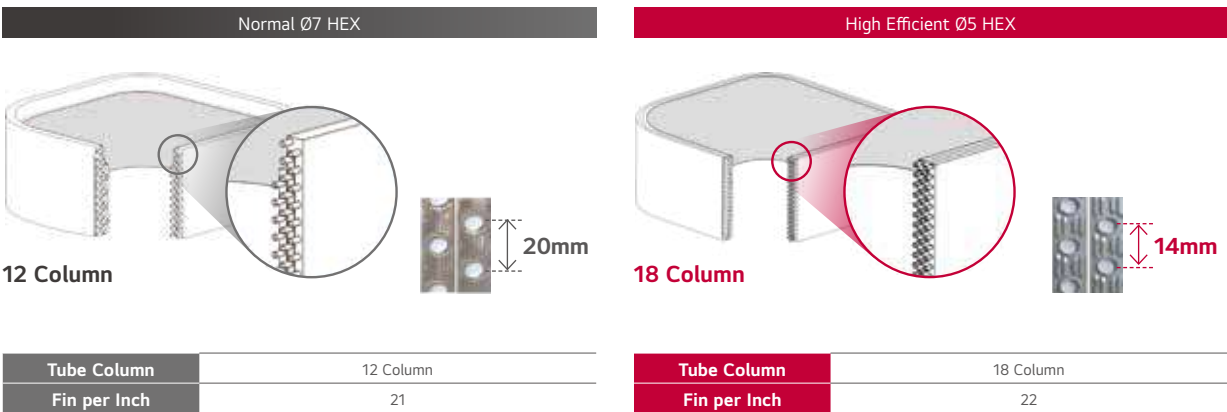

Ceiling to Floor Temperature Sensing

With a special sensor that senses both ceiling and floor temperature, dual vane 4 Way cassette provides comfortable air.



Human Detection Air Flow

Human detection provides users with direct or indirect air flow preferences.

Indirect comfort

Provides air flow that blows away from user for comfort.




Direct cooling

Provides air flow that blows directly onto user for cooling.



Human Detection for Optimized Efficiency

The indoor unit senses human presence to switch on or off for maximum power savings of 54%.

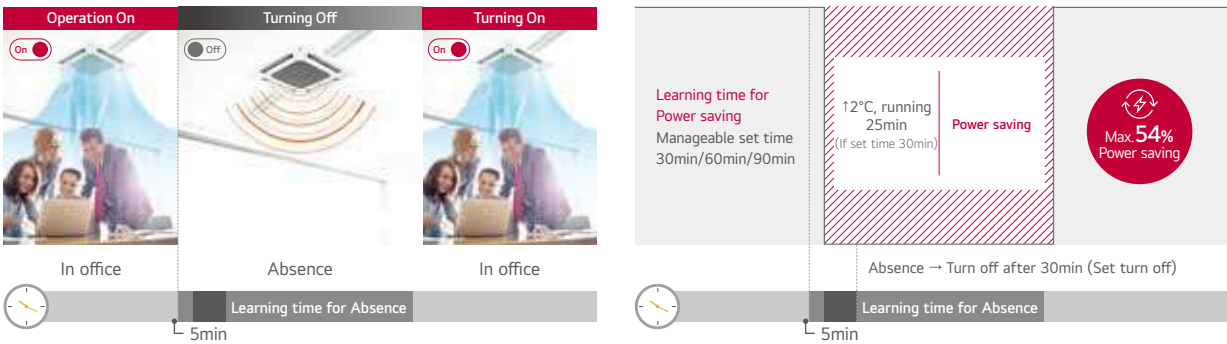

※ Smart Dual Vane Indoor Unit '19 Line up.
※ Data Based on actual test of LG, single product 2 hours measurement result. (Cooling 26 °C, strong wind)

High-performance Air Cleaning

Air cleaning function provides fresh, filtered air.



Convenient & Powerful 5-Step Air Purification

Easy-to-manage Air Purification system with one-touch Air Purification filter.

Air Purification Kit



Cycle Management

Pre-filter	PM1.0 Filter	Deodorization Filter
Washable	6 months / Washable	6 months / Dry in sunlight

Air Quality Level Display

Wi-Fi functionality for anytime, anywhere indoor unit control and air quality level display.

① IDU LED

Real-time indoor air quality level displayed on indoor unit

② Remote controller


Air quality level displayed on remote controller

③ Mobile

Anytime, anywhere access to check & control air status via mobile

Direct Wind

Wind can reach up to 5m with significant air volume. (@ 0.5ms)

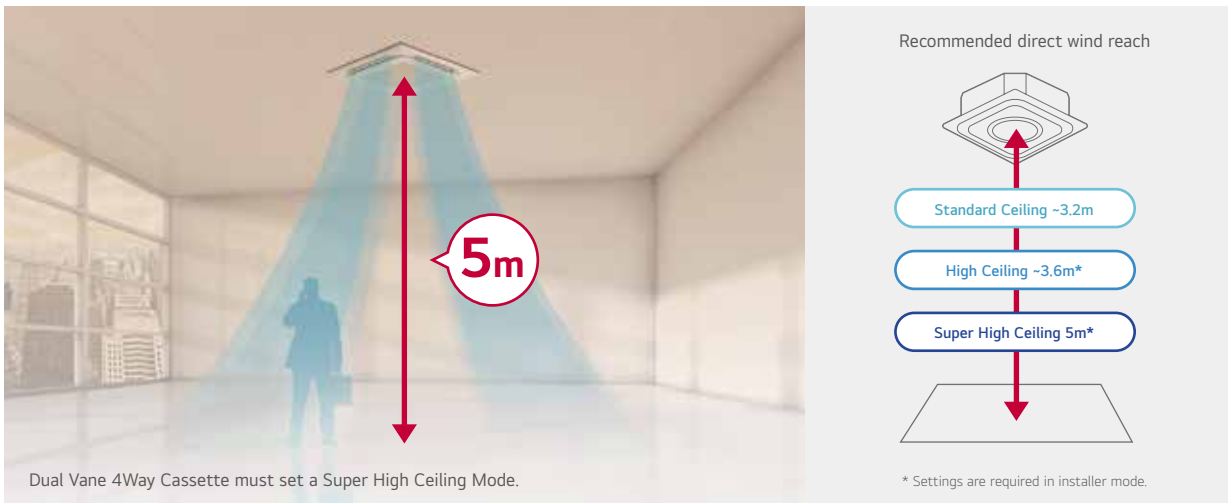

ThinQ Connectivity

Connect to IDU with LG ThinQ regardless time and place



- ① Monitoring Air status : Easy to check indoor air status
 - Ultra Fine / Extra Fine / Fine Dust
 - Day / Week /Month / Yearly
- ② Mobile Remote Control : Remote control by using mobile phone
 - Control Mode / Temperature / Air flow etc.
- ③ Display Power Consumption : Check power consumption of A/C
 - Check energy display
 - Set target energy consumption level

※ For our policy of continuous ThinQ App improvement, specification, design and features are subject to change without prior notice.

Easy Filter Cleaning for Air Purification

Air Purification Kit filters do NOT need replacement and can be used semi-permanently. Also, thanks to easy maintenance, users can use air purification conveniently without any worries regarding their filter's cleanliness.

Air Purification kit




Cycle / Wash

6 Months / Dry in sunlight

6 Months / Washable

2 Weeks / Washable

Air Purification panel

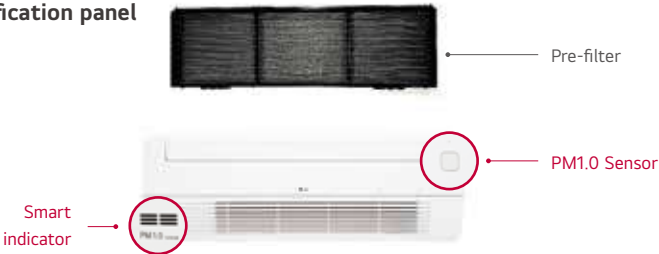

1) It increases the electrostatic force of particle to improve collection efficiency
※ Normally HEPA filter type must be replaced regularly. It means that it costs expensive for maintenance.

Direct & Indirect Wind

Provides users with direct or indirect air flow preferences.

Comfort indirect wind

Without touching the skin directly. This ensures large spaces remain comfortable.




Cooler on a hot day.



Minimized Height (1 Way)

With a height of 132mm, the LG 1 Way cassette is the ideal solution for limited-space installations.

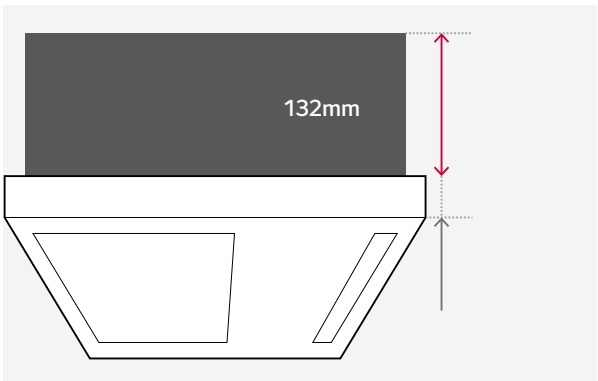


Size Comparison

	A Company	B company	LG
1 Way Cassette	215	230	132


Flexible Installation (1 Way)

1 Way cassette doesn't require the inspection access hole, enabling simple installation.


1 Way cassette

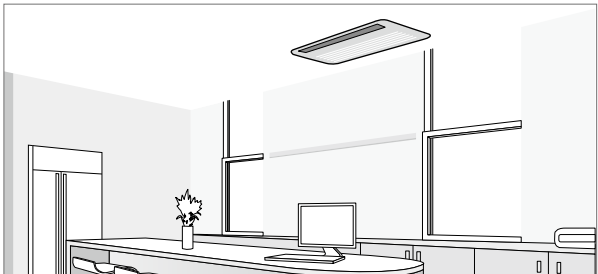

Duct

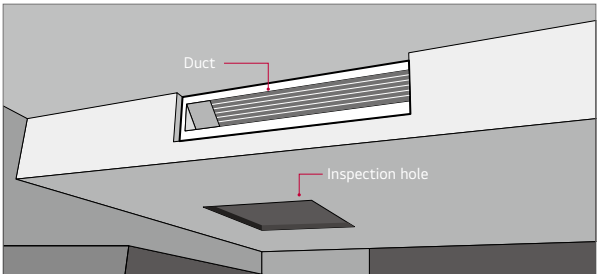


Installation Standard (1 Way)

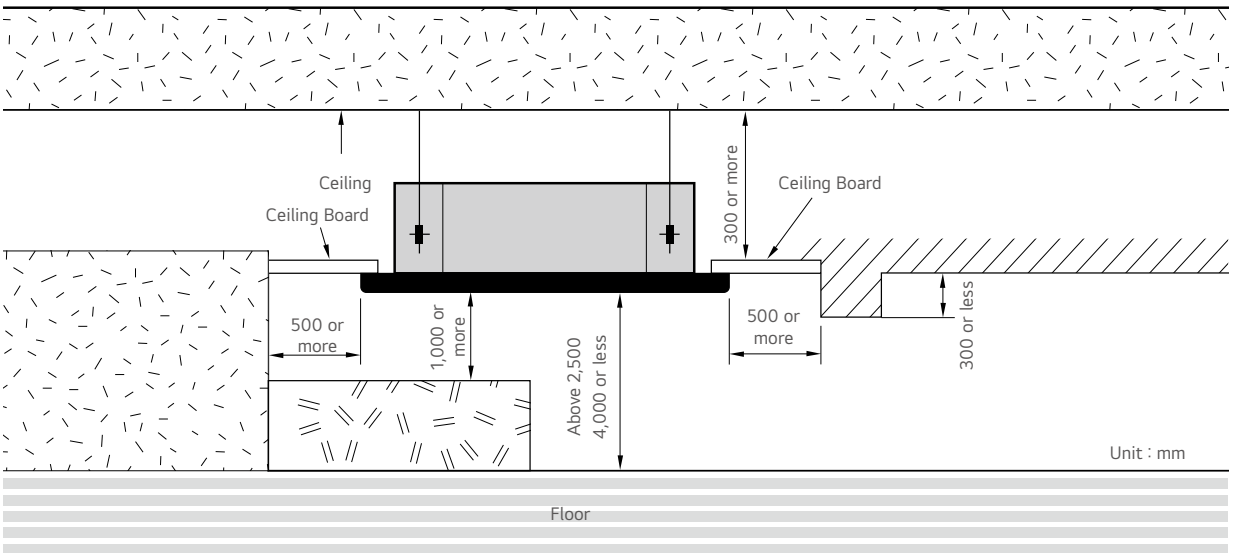

Safe Plus Insulation

Why LG Safe Plus Insulation?

Safe Plus Insulation is an antimicrobial treatment that is applied to LG MULTI V Indoor unit internal insulation components to resist bacterial growth, providing cleaner and fresher airflow to customers.

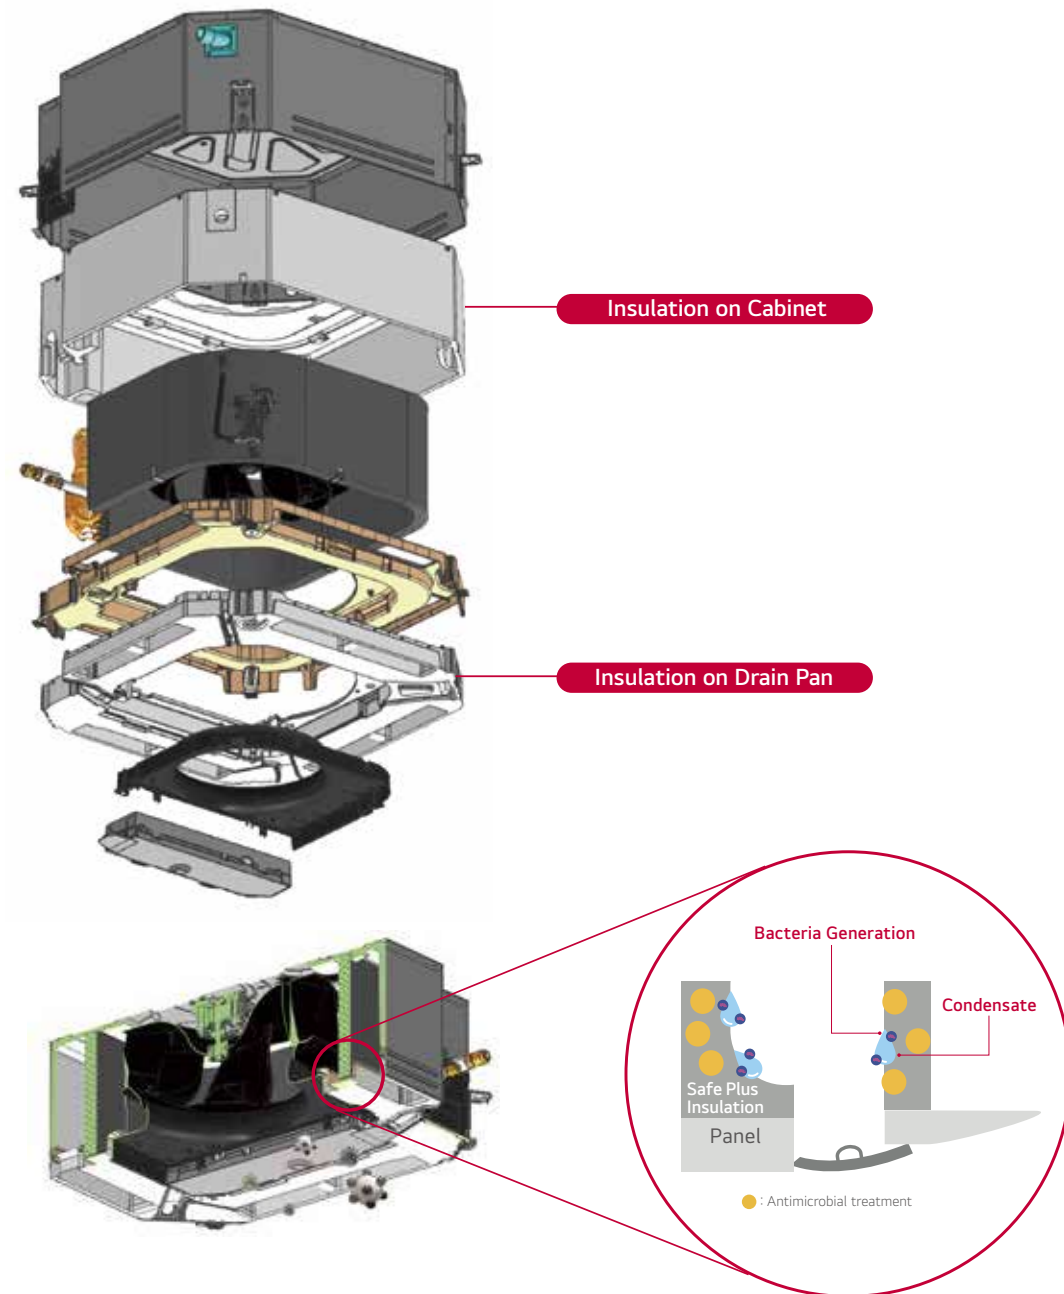

What's the hygiene inside of your air conditioner?



Example of EPS Pollution case.

Today's air conditioners all generally provide fast cooling and energy saving features, as well as the ability to filter bacteria, dust and mold for purified air. However, how hygienic is the inside of the air conditioner? If the inside of the air conditioner is contaminated, what can you do?

Antimicrobial treatment on **EPS (Cabinet, Drain Pan, Air Guide, Insulator, Supporter)** for Air Conditioners is the first applied technology in the world, which only LG has access to.

EPS for Resistant to Bacterial Growth applied product



ARNU24GTBB4 / ARNU28GTBB4
ARNU30GTBB4



MODEL		UNIT	ARNU24GTBB4	ARNU28GTBB4	ARNU30GTBB4
Cooling Capacity		kW	7.1	8.2	9.0
Heating Capacity		kW	8.0	9.2	10.0
Power Input (H / M / L)	Nominal	W	32 / 27 / 20	37 / 30 / 22	48 / 36 / 25
Dimensions (W x H x D)	Body	mm	840 x 204 x 840	840 x 204 x 840	840 x 204 x 840
	Shipping	mm	922 x 276 x 917	922 x 276 x 917	922 x 276 x 917
Fan	Type	-	Full 3D Turbo Fan	Full 3D Turbo Fan	Full 3D Turbo Fan
	Motor Output x Number	W	51 x 1	51 x 1	51 x 1
	Air Flow Rate (H / M / L)	m³/min	18 / 17 / 15	19 / 17 / 15	21 / 19 / 16
	Motor Type	-	BLDC	BLDC	BLDC
Air Filter		-	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)	Ø25 (1)
Weight	Body	kg	21	21	21
Sound Pressure Level (H / M / L)		dB(A)	39 / 37 / 35	40 / 38 / 35	43 / 40 / 36
Sound Power Level (H / M / L)		dB(A)	46 / 44 / 42	50 / 46 / 43	53 / 50 / 45
Power Supply		V / Ø / Hz	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50
Communication Cable (VCTF-SB)		mm² x cores	1.0 ~ 1.5 x 2	1.0 ~ 1.5 x 2	1.0 ~ 1.5 x 2
Decoration Panel (Accessory)	Model Name	-	PT-AAGW0 PT-AFGW0	PT-AAGW0 PT-AFGW0	PT-AAGW0 PT-AFGW0
	Exterior Color	-	White	White	White
	RAL Code	-	RAL 9003	RAL 9003	RAL 9003
	Net Dimensions (W x H x D)	mm	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950
	Net Weight	kg	7.1 / 7.5	7.1 / 7.5	7.1 / 7.5

Note :
1. Performance tested under EN14511
2. Capacities are based on the following conditions
- Cooling : Indoor temp. 27℃ (80.6°F) DB / 19℃ (66.2°F) WB, Outdoor temp. 35℃ (95°F) DB / 24℃ (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20℃ (68°F) DB / 15℃ (59°F) WB, Outdoor temp. 7℃ (44.6°F) DB / 6℃ (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification

Accessories

CHASSIS	ARNU24GTBB4	ARNU28GTBB4	ARNU30GTBB4
Drain Pump		○	
Cassette Cover		PTDCA	
Refrigerant Leak Detector		PRLDNVS0 (R410A), PLDRNV1S (R32)	
EEV Kit		-	
Multi-tenant Power Module		PINPMB001	
Robot Cleaner		-	
Pre Filter (Washable)		○	
Ion Generator		PAS-NATDR2	
CO ₂ Sensor		-	
Ventilation Kit		-	
IR Receiver		-	
Zone Controller		-	
Dry Contact (with additional accessory)		PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 Point)		○	
Wi-Fi		PWFMD200	
Human Detection Sensor		PTVSAA0	
Floor Temperature Sensor		PTFSMA0	
Air Purification Kit		PTAHMP0 (PT-AFGW0 panel required)	
Elevation Grille		PT-AEGW0.ENCXLEU (Panel), PTVK440.ENCXLEU (Kit)	

ARNU36GTAB4 / ARNU42GTAB4
ARNU48GTAB4



MODEL		UNIT	ARNU36GTAB4	ARNU42GTAB4	ARNU48GTAB4
Cooling Capacity		kW	10.6	12.3	14.1
Heating Capacity		kW	11.9	13.8	15.9
Power Input (H / M / L)	Nominal	W	69 / 49 / 37	97 / 69 / 49	110 / 76 / 61
Dimensions (W x H x D)	Body	mm	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840
	Shipping	mm	922 x 360 x 917	922 x 360 x 917	922 x 360 x 917
Fan	Type	-	Full 3D Turbo Fan	Full 3D Turbo Fan	Full 3D Turbo Fan
	Motor Output x Number	W	135 x 1	135 x 1	135 x 1
	Air Flow Rate (H / M / L)	m³/min	29 / 26 / 22	33 / 29 / 26	34 / 30 / 28
	Motor Type	-	BLDC	BLDC	BLDC
Air Filter		-	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)	Ø25 (1)
Weight	Body	kg	26	26	26
Sound Pressure Level (H / M / L)		dB(A)	43 / 40 / 37	47 / 43 / 40	48 / 44 / 42
Sound Power Level (H / M / L)		dB(A)	54 / 51 / 47	56 / 53 / 49	58 / 54 / 53
Power Supply		V / Ø / Hz	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50
Communication Cable (VCTF-SB)		mm² x cores	1.0 ~ 1.5 x 2	1.0 ~ 1.5 x 2	1.0 ~ 1.5 x 2
Decoration Panel (Accessory)	Model Name	-	PT-AAGW0 PT-AFGW0	PT-AAGW0 PT-AFGW0	PT-AAGW0 PT-AFGW0
	Exterior Color	-	White	White	White
	RAL Code	-	RAL 9003	RAL 9003	RAL 9003
	Net Dimensions (W x H x D)	mm	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950
	Net Weight	kg	7.1 / 7.5	7.1 / 7.5	7.1 / 7.5

Note : 1. Performance tested under EN14511
2. Capacities are based on the following conditions
- Cooling : Indoor temp. 27℃ (80.6°F) DB / 19℃ (66.2°F) WB, Outdoor temp. 35℃ (95°F) DB / 24℃ (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20℃ (68°F) DB / 15℃ (59°F) WB, Outdoor temp. 7℃ (44.6°F) DB / 6℃ (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification

Accessories

CHASSIS	ARNU36GTAB4	ARNU42GTAB4	ARNU48GTAB4
Drain Pump		○	
Cassette Cover		PTDCA	
Refrigerant Leak Detector		PRLDNVS0 (R410A), PLDRNV1S (R32)	
EEV Kit		-	
Multi-tenant Power Module		PINPMB001	
Robot Cleaner		-	
Pre Filter (Washable)		○	
Ion Generator		PAS-NATDR2	
CO ₂ Sensor		-	
Ventilation Kit		-	
IR Receiver		-	
Zone Controller		-	
Dry Contact (with additional accessory)		PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 Point)		○	
Wi-Fi		PWFMD200	
Human Detection Sensor		PTVSAA0	
Floor Temperature Sensor		PTFSMA0	
Air Purification Kit		PTAHMP0 (PT-AFGW0 panel required)	
Elevation Grille		PT-AEGW0.ENCXLEU (Panel), PTVK440.ENCXLEU (Kit)	

High sensible

ARNU05GTAA4 / ARNU07GTAA4 / ARNU09GTAA4
ARNU12GTAA4 / ARNU15GTAA4 / ARNU18GTAA4



MODEL		UNIT	ARNU05GTAA4	ARNU07GTAA4	ARNU09GTAA4	ARNU12GTAA4	ARNU15GTAA4	ARNU18GTAA4
Cooling Capacity		kW	1.6	2.2	2.8	3.6	4.5	5.6
Heating Capacity		kW	1.8	2.5	3.2	4.0	5.0	6.3
Power Input (H / M / L)	Nominal	W	20 / 15 / 11	23 / 16 / 11	25 / 18 / 11	26 / 19 / 13	29 / 20 / 15	31 / 23 / 16
Dimensions (W x H x D)	Body	mm	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840
	Shipping	mm	922 x 360 x 917	922 x 360 x 917	922 x 360 x 917	922 x 360 x 917	922 x 360 x 917	922 x 360 x 917
Fan	Type	-	Full 3D Turbo Fan	Full 3D Turbo Fan	Full 3D Turbo Fan	Full 3D Turbo Fan	Full 3D Turbo Fan	Full 3D Turbo Fan
	Motor Output x Number	W	166 x 1	166 x 1	166 x 1	166 x 1	166 x 1	166 x 1
	Running Current	A	0.21	0.23	0.25	0.25	0.27	0.28
	Air Flow Rate (H / M / L)	m³/min	18 / 15 / 13	19 / 16 / 13	19 / 16 / 13	20 / 17 / 15	20 / 17 / 15	21 / 19 / 16
	Motor Type	-	BLDC	BLDC	BLDC	BLDC	BLDC	BLDC
Air Filter		-	Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)	Ø25 (1)	Ø25 (1)	Ø25 (1)	Ø25 (1)
Weight	Body	kg	26	27	27	27	27	27
Sound Pressure Level (H / M / L)		dB(A)	32 / 29 / 26	32 / 30 / 26	33 / 30 / 26	34 / 31 / 27	34 / 32 / 29	35 / 32 / 30
Sound Power Level (H / M / L)		dB(A)	40 / 37 / 36	41 / 38 / 36	42 / 39 / 36	42 / 40 / 37	43 / 40 / 38	44 / 41 / 38
Power Supply		V / Ø / Hz	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50
Communication Cable (VCTF-SB)		mm² x cores	1.0 ~ 1.5 x 2	1.0 ~ 1.5 x 2	1.0 ~ 1.5 x 2	1.0 ~ 1.5 x 2	1.0~1.5 x 2	1.0 ~ 1.5 x 2
Decoration Panel (Accessory)	Model Name	-	PT-AAGW0 PT-AFGW0	PT-AAGW0 PT-AFGW0	PT-AAGW0 PT-AFGW0	PT-AAGW0 PT-AFGW0	PT-AAGW0 PT-AFGW0	PT-AAGW0 PT-AFGW0
	Exterior Color	-	White	White	White	White	White	White
	RAL Code	-	RAL 9003	RAL 9003	RAL 9003	RAL 9003	RAL 9003	RAL 9003
	Net Dimensions (W x H x D)	mm	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950
	Net Weight	kg	7.1 / 7.5	7.1 / 7.5	7.1 / 7.5	7.1 / 7.5	7.1 / 7.5	7.1 / 7.5

Note :
1. Performance tested under EN14511
2. Capacities are based on the following conditions
- Cooling : Indoor temp. 27℃ (80.6°F) DB / 19℃ (66.2°F) WB, Outdoor temp. 35℃ (95°F) DB / 24℃ (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20℃ (68°F) DB / 15℃ (59°F) WB, Outdoor temp. 7℃ (44.6°F) DB / 6℃ (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification

Accessories

CHASSIS	ARNU05GTAA4	ARNU07GTAA4	ARNU09GTAA4	ARNU12GTAA4	ARNU15GTAA4	ARNU18GTAA4
Drain Pump	○					
Cassette Cover	PTDCA					
Refrigerant Leak Detector	PRLDNVS0 (R410A), PLDRNV1S (R32)					
EEV Kit	-					
Multi-tenant Power Module	PINPMB001					
Robot Cleaner	-					
Pre Filter (Washable)	○					
Ion Generator	PAS-NATDR2					
CO ₂ Sensor	-					
Ventilation Kit	-					
IR Receiver	-					
Zone Controller	-					
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)					
External Input (1 Point)	○					
Wi-Fi	PWFMD200					
Human Detection Sensor	PTVSAA0					
Floor Temperature Sensor	PTFSMA0					
Air Purification Kit	PTAHMP0 (PT-AFGW0 panel required)					
Elevation Grille	-					

High sensible

ARNU24GTAA4 / ARNU28GTAA4 / ARNU36GTAA4
ARNU42GTAA4 / ARNU48GTAA4



MODEL		UNIT	ARNU24GTAA4	ARNU28GTAA4	ARNU36GTAA4	ARNU42GTAA4	ARNU48GTAA4
Cooling Capacity		kW	7.1	8.2	10.6	12.3	14.1
Heating Capacity		kW	8.0	9.2	11.9	13.8	15.9
Power Input (H / M / L)	Nominal	W	40 / 31 / 25	46 / 35 / 26	65 / 43 / 31	86 / 65 / 43	100 / 67 / 53
Dimensions (W x H x D)	Body	mm	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840
	Shipping	mm	922 x 360 x 917	922 x 360 x 917	922 x 360 x 917	922 x 360 x 917	922 x 360 x 917
Fan	Type	-	Full 3D Turbo Fan	Full 3D Turbo Fan	Full 3D Turbo Fan	Full 3D Turbo Fan	Full 3D Turbo Fan
	Motor Output x Number	W	166 x 1	166 x 1	166 x 1	166 x 1	166 x 1
	Running Current	A	0.38	0.46	0.60	0.80	0.88
	Air Flow Rate (H / M / L)	m³/min	23 / 21 / 19	24 / 22 / 20	28 / 24 / 21	31 / 28 / 24	33 / 28 / 26
	Motor Type	-	BLDC	BLDC	BLDC	BLDC	BLDC
Air Filter		-	Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)	Ø25 (1)	Ø25 (1)	Ø25 (1)
Weight	Body	kg	27	27	27	27	27
Sound Pressure Level (H / M / L)		dB(A)	39 / 36 / 33	40 / 37 / 34	42 / 39 / 35	46 / 42 / 39	47 / 43 / 41
Sound Power Level (H / M / L)		dB(A)	47 / 45 / 42	48 / 46 / 42	51 / 48 / 44	54 / 51 / 48	56 / 52 / 50
Power Supply		V / Ø / Hz	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50
Communication Cable (VCTF-SB)		mm² x cores	1.0 ~ 1.5 x 2	1.0 ~ 1.5 x 2	1.0 ~ 1.5 x 2	1.0~1.5 x 2	1.0 ~ 1.5 x 2
Decoration Panel (Accessory)	Model Name	-	PT-AAGW0 PT-AFGW0	PT-AAGW0 PT-AFGW0	PT-AAGW0 PT-AFGW0	PT-AAGW0 PT-AFGW0	PT-AAGW0 PT-AFGW0
	Exterior Color	-	White	White	White	White	White
	RAL Code	-	RAL 9003	RAL 9003	RAL 9003	RAL 9003	RAL 9003
	Net Dimensions (W x H x D)	mm	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950
	Net Weight	kg	7.1 / 7.5	7.1 / 7.5	7.1 / 7.5	7.1 / 7.5	7.1 / 7.5

Note :
1. Performance tested under EN14511
2. Capacities are based on the following conditions
- Cooling : Indoor temp. 27℃ (80.6°F) DB / 19℃ (66.2°F) WB, Outdoor temp. 35℃ (95°F) DB / 24℃ (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20℃ (68°F) DB / 15℃ (59°F) WB, Outdoor temp. 7℃ (44.6°F) DB / 6℃ (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification

Accessories

CHASSIS	ARNU24GTAA4	ARNU28GTAA4	ARNU36GTAA4	ARNU42GTAA4	ARNU48GTAA4
Drain Pump	○				
Cassette Cover	PTDCA				
Refrigerant Leak Detector	PRLDNVS0 (R410A), PLDRNV1S (R32)				
EEV Kit	-				
Multi-tenant Power Module	PINPMB001				
Robot Cleaner	-				
Pre Filter (Washable)	○				
Ion Generator	PAS-NATDR2				
CO ₂ Sensor	-				
Ventilation Kit	-				
IR Receiver	-				
Zone Controller	-				
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)				
External Input (1 Point)	○				
Wi-Fi	PWFMD200				
Human Detection Sensor	PTVSAA0				
Floor Temperature Sensor	PTFSMA0				
Air Purification Kit	PTAHMP0 (PT-AFGW0 panel required)				
Elevation Grille	PT-AEGW0.ENCXLEU (Panel), PTVK440.ENCXLEU (Kit)				

ARNU05GTRB4 / ARNU07GTRB4
ARNU09GTRB4 / ARNU12GTRB4



MODEL		UNIT	ARNU05GTRB4	ARNU07GTRB4	ARNU09GTRB4	ARNU12GTRB4
Cooling Capacity		kW	1.6	2.2	2.8	3.6
Heating Capacity		kW	1.8	2.5	3.2	4.0
Power Input (H / M / L)	Nominal	W	13 / 12 / 11	13 / 12 / 11	14 / 13 / 12	17 / 15 / 13
Dimensions (W x H x D)	Body	mm	570 x 214 x 570	570 x 214 x 570	570 x 214 x 570	570 x 214 x 570
	Shipping	mm	667 x 285 x 646	667 x 285 x 646	667 x 285 x 646	667 x 285 x 646
Fan	Type	-	Turbo Fan	Turbo Fan	Turbo Fan	Turbo Fan
	Motor Output x Number	W	43 x 1	43 x 1	43 x 1	43 x 1
	Air Flow Rate (H / M / L)	m³/min	7.5 / 7.0 / 6.6	7.5 / 7.0 / 6.6	8.0 / 7.5 / 7.1	8.7 / 8.0 / 7.0
	Motor Type	-	BLDC	BLDC	BLDC	BLDC
Air Filter		-	Pre Filter	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)	Ø25 (1)	Ø25 (1)
Weight		kg	12.6	12.6	13.7	13.7
Sound Pressure Levels (H / M / L)		dB(A)	29 / 27 / 26	29 / 27 / 26	30 / 29 / 27	32 / 30 / 27
Sound Power Levels (H / M / L)		dB(A)	47 / 46 / 45	47 / 46 / 45	48 / 46 / 45	51 / 48 / 45
Power Supply		V / Ø / Hz	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50
Transmission Cable		mm²	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C
Decoration Panel (Accessory)	Model Name	-	PT-QAGW0	PT-QAGW0	PT-QAGW0	PT-QAGW0
	Exterior Color	-	White	White	White	White
	RAL Code	-	RAL 9001	RAL 9001	RAL 9001	RAL 9001
	Net Dimensions (W x H x D)	mm	620 x 35 x 620	620 x 35 x 620	620 x 35 x 620	620 x 35 x 620
	Net Weight	kg	3.2 / 3.0 / 2.9	3.2 / 3.0 / 2.9	3.2 / 3.0 / 2.9	3.2 / 3.0 / 2.9

Note :
1. Performance tested under EN14511
2. Capacities are based on the following conditions
- Cooling : Indoor temp. 27℃ (80.6℉) DB / 19℃ (66.2℉) WB, Outdoor temp. 35℃ (95℉) DB / 24℃ (75.2℉) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20℃ (68℉) DB / 15℃ (59℉) WB, Outdoor temp. 7℃ (44.6℉) DB / 6℃ (42.8℉) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification

Accessories

CHASSIS	ARNU05GTRB4	ARNU07GTRB4	ARNU09GTRB4	ARNU12GTRB4
Drain Pump		○		
Cassette Cover		-		
Refrigerant Leak Detector		PRLDNVS0 (R410A), PLDRNV1S (R32)		
EEV Kit		PRGK024A0 (~4.5kW)		
Multi-tenant Power Module		PINPMB001		
Robot Cleaner		-		
Pre Filter (Washable)		○		
Ion Generator		PAS-NATDR2		
CO ₂ Sensor		-		
Ventilation Kit		PTVK430		
IR Receiver		-		
Zone Controller		-		
Dry Contact (with additional accessory)		PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)		
External Input (1 point)		○		
Wi-Fi		PWFMDD200		

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

ARNU15GTQB4 / ARNU18GTQB4
ARNU21GTQB4



MODEL		UNIT	ARNU15GTQB4	ARNU18GTQB4	ARNU21GTQB4
Cooling Capacity		kW	4.5	5.6	6.0
Heating Capacity		kW	5.0	6.3	6.8
Power Input (H / M / L)	Nominal	W	24 / 21 / 18	25 / 22 / 19	28 / 23 / 20
Dimensions (W x H x D)	Body	mm	570 x 256 x 570	570 x 256 x 570	570 x 256 x 570
	Shipping	mm	667 x 327 x 646	667 x 327 x 646	667 x 327 x 646
Fan	Type	-	Turbo Fan	Turbo Fan	Turbo Fan
	Motor Output x Number	W	43 x 1	43 x 1	43 x 1
	Air Flow Rate (H / M / L)	m³/min	11.0 / 10.0 / 9.3	11.2 / 11.0 / 10.0	12.0 / 11.1 / 9.4
	Motor Type	-	BLDC	BLDC	BLDC
Air Filter		-	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)	Ø25 (1)
Weight		kg	15.0	15.0	15.0
Sound Pressure Levels (H / M / L)		dB(A)	36 / 34 / 32	37 / 35 / 34	40 / 38 / 34
Sound Power Levels (H / M / L)		dB(A)	52 / 50 / 46	52 / 50 / 46	54 / 52 / 46
Power Supply		V / Ø / Hz	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50
Transmission Cable		mm²	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C
Decoration Panel (Accessory)	Model Name	-	PT-QAGW0	PT-QAGW0	PT-QAGW0
	Exterior Color	-	White	White	White
	RAL Code	-	RAL 9001	RAL 9001	RAL 9001
	Net Dimensions (W x H x D)	mm	620 x 35 x 620	620 x 35 x 620	620 x 35 x 620
	Net Weight	kg	3.2 / 3.0 / 2.9	3.2 / 3.0 / 2.9	3.2 / 3.0 / 2.9

Note :
1. Performance tested under EN14511
2. Capacities are based on the following conditions
- Cooling : Indoor temp. 27℃ (80.6℉) DB / 19℃ (66.2℉) WB, Outdoor temp. 35℃ (95℉) DB / 24℃ (75.2℉) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20℃ (68℉) DB / 15℃ (59℉) WB, Outdoor temp. 7℃ (44.6℉) DB / 6℃ (42.8℉) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification

Accessories

CHASSIS	ARNU15GTQB4	ARNU18GTQB4	ARNU21GTQB4
Drain Pump		○	
Cassette Cover		-	
Refrigerant Leak Detector		PRLDNVS0 (R410A), PLDRNV1S (R32)	
EEV Kit		PRGK024A0 (~4.5kW)	
Multi-tenant Power Module		PINPMB001	
Robot Cleaner		-	
Pre Filter (Washable)		○	
Ion Generator		PAS-NATDR2	
CO ₂ Sensor		-	
Ventilation Kit		PTVK430	
IR Receiver		-	
Zone Controller		-	
Dry Contact (with additional accessory)		PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 point)		○	
Wi-Fi		PWFMDD200	

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

ARNU09GTSC4 / ARNU12GTSC4



MODEL		UNIT	ARNU09GTSC4	ARNU12GTSC4
Cooling Capacity		kW	2.8	3.6
Heating Capacity		kW	3.2	4.0
Power Input (H / M / L)	Nominal	W	16 / 14 / 11	18 / 14 / 11
Dimensions (W x H x D)	Body	mm	830 x 225 x 600	830 x 225 x 600
	Shipping	mm	1,055 x 290 x 682	1,055 x 290 x 682
	Type	-	Turbo Fan	Turbo Fan
Fan	Motor Output x Number	W x No.	37 x 1	37 x 1
	Air Flow Rate (H / M / L)	m³/min	10.8 / 9.8 / 9.1	11.1 / 10.3 / 9.1
	Motor Type	-	BLDC	BLDC
Air Filter		-	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)
Weight	Body	kg	18.1	18.1
Sound Pressure Levels (H / M / L)		dB(A)	33 / 31 / 29	34 / 32 / 29
Sound Power Levels (H / M / L)		dB(A)	44 / 41 / 40	44 / 42 / 40
Power Supply		V / Ø / Hz	220-240 / 1 / 50	220-240 / 1 / 50
Communication Cable		mm²	1.0 ~ 1.5 × 2C	1.0 ~ 1.5 × 2C
Decoration Panel (Accessory)	Model Name	-	PT-USC	PT-USC
	Exterior Color	-	Morning Fog	Morning Fog
	RAL Code	-	RAL 9001	RAL 9001
	Net Dimensions (W x H x D)	mm	1,100 x 28 x 690	1,100 x 28 x 690
	Net Weight	kg	4.7	4.7

Note :
1. Performance tested under EN14511
2. Capacities are based on the following conditions
- Cooling : Indoor temp. 27℃ (80.6℉) DB / 19℃ (66.2℉) WB, Outdoor temp. 35℃ (95℉) DB / 24℃ (75.2℉) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20℃ (68℉) DB / 15℃ (59℉) WB, Outdoor temp. 7℃ (44.6℉) DB / 6℃ (42.8℉) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification

Accessories

CHASSIS	ARNU09GTSC4	ARNU12GTSC4
Drain Pump	○	
Cassette Cover	-	
Refrigerant Leak Detector	PRLDNVS0 (R410A), PLDRNV1S (R32)	
EEV Kit	PRGK024A0 (~5.6kW)	
Multi-tenant Power Module	PINPMB001	
Robot Cleaner	-	
Pre Filter (Washable)	○	
Ion Generator	-	
CO ₂ Sensor	-	
Ventilation Kit	-	
IR Receiver	-	
Zone Controller	-	
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 point)	○	
Wi-Fi	PWFMD200	

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

ARNU18GTSC4 / ARNU24GTSC4



MODEL		UNIT	ARNU18GTSC4	ARNU24GTSC4
Cooling Capacity		kW	5.6	7.1
Heating Capacity		kW	6.3	8.0
Power Input (H / M / L)	Nominal	W	19 / 16 / 14	31 / 22 / 14
Dimensions (W x H x D)	Body	mm	830 x 225 x 600	830 x 225 x 600
	Shipping	mm	1,055 x 290 x 682	1,055 x 290 x 682
	Type	-	Turbo Fan	Turbo Fan
Fan	Motor Output x Number	W x No.	37 x 1	37 x 1
	Air Flow Rate (H / M / L)	m³/min	11.8 / 10.8 / 9.8	14.5 / 12.4 / 10.3
	Motor Type	-	BLDC	BLDC
Air Filter		-	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)
Weight	Body	kg	18.1	18.1
Sound Pressure Levels (H / M / L)		dB(A)	35 / 33 / 31	40 / 37 / 33
Sound Power Levels (H / M / L)		dB(A)	45 / 44 / 41	51 / 48 / 42
Power Supply		V / Ø / Hz	220-240 / 1 / 50	220-240 / 1 / 50
Communication Cable		mm²	1.0 ~ 1.5 × 2C	1.0 ~ 1.5 × 2C
Decoration Panel (Accessory)	Model Name	-	PT-USC	PT-USC
	Exterior Color	-	Morning Fog	Morning Fog
	RAL Code	-	RAL 9001	RAL 9001
	Net Dimensions (W x H x D)	mm	1,100 x 28 x 690	1,100 x 28 x 690
	Net Weight	kg	4.7	4.7

Note :
1. Performance tested under EN14511
2. Capacities are based on the following conditions
- Cooling : Indoor temp. 27℃ (80.6℉) DB / 19℃ (66.2℉) WB, Outdoor temp. 35℃ (95℉) DB / 24℃ (75.2℉) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20℃ (68℉) DB / 15℃ (59℉) WB, Outdoor temp. 7℃ (44.6℉) DB / 6℃ (42.8℉) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification

Accessories

CHASSIS	ARNU18GTSC4	ARNU24GTSC4
Drain Pump	○	
Cassette Cover	-	
Refrigerant Leak Detector	PRLDNVS0 (R410A), PLDRNV1S (R32)	
EEV Kit	PRGK024A0 (~5.6kW)	
Multi-tenant Power Module	PINPMB001	
Robot Cleaner	-	
Pre Filter (Washable)	○	
Ion Generator	-	
CO ₂ Sensor	-	
Ventilation Kit	-	
IR Receiver	-	
Zone Controller	-	
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 point)	○	
Wi-Fi	PWFMD200	

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

ARNU07GTUB4 / ARNU09GTUB4
ARNU12GTUB4



MODEL		UNIT	ARNU07GTUB4	ARNU09GTUB4	ARNU12GTUB4
Cooling Capacity		kW	2.2	2.8	3.6
Heating Capacity		kW	2.5	3.2	4.0
Power Input (H / M / L)	Nominal	W	20 / 18 / 16	22 / 20 / 18	24 / 22 / 20
Dimensions (W x H x D)	Body	mm	860 x 132 x 450	860 x 132 x 450	860 x 132 x 450
	Shipping	mm	1,129 x 259 x 538	1,129 x 259 x 538	1,129 x 259 x 538
	Type	-	Cross Flow Fan	Cross Flow Fan	Cross Flow Fan
Fan	Motor Output x Number	W x No.	30 x 1	30 x 1	30 x 1
	Air Flow Rate (H / M / L)	m³/min	8.2 / 7.3 / 6.4	9.2 / 8.6 / 8.2	10.0 / 9.2 / 8.2
	Motor Type	-	BLDC	BLDC	BLDC
Air Filter		-	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)	Ø25 (1)
Weight	Body	kg	12.2	12.2	12.2
Sound Pressure Levels (H / M / L)		dB(A)	32 / 29 / 25	35 / 34 / 32	38 / 35 / 32
Sound Power Levels (H / M / L)		dB(A)	47 / 44 / 41	51 / 49 / 47	52 / 51 / 47
Power Supply		V / Ø / Hz	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50
Transmission Cable		mm²	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C
Decoration Panel (Accessory)	Model Name	-	PT-UAHG0, PT-UAHW0, PT-UPHG0	PT-UAHG0, PT-UAHW0, PT-UPHG0	PT-UAHG0, PT-UAHW0, PT-UPHG0
	Exterior Color	-	Noble White	Noble White	Noble White
	RAL Code	-	RAL 9003	RAL 9003	RAL 9003
	Net Dimensions (W x H x D)	mm	1,160 x 34 x 500	1,160 x 34 x 500	1,160 x 34 x 500
			1,100 x 34 x 500	1,100 x 34 x 500	1,100 x 34 x 500
			1,160 x 34 x 500	1,160 x 34 x 500	1,160 x 34 x 500
	Net Weight	kg	3.9 / 3.3 / 4.1	3.9 / 3.3 / 4.1	3.9 / 3.3 / 4.1

Note :
1. Performance tested under EN14511
2. Capacities are based on the following conditions
- Cooling : Indoor temp. 27℃ (80.6℉) DB / 19℃ (66.2℉) WB, Outdoor temp. 35℃ (95℉) DB / 24℃ (75.2℉) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20℃ (68℉) DB / 15℃ (59℉) WB, Outdoor temp. 7℃ (44.6℉) DB / 6℃ (42.8℉) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification

Accessories

CHASSIS	ARNU07GTUB4	ARNU09GTUB4	ARNU12GTUB4
Drain Pump		○	
Cassette Cover		-	
Refrigerant Leak Detector		PRLDNVS0 (R410A), PLDRNV1S (R32)	
EEV Kit		PRGK024A0	
Multi-tenant Power Module		PINPMB001	
Robot Cleaner		-	
Pre Filter (Washable)		○	
Ion Generator		-	
CO ₂ Sensor		-	
Ventilation Kit		-	
IR Receiver		-	
Zone Controller		-	
Dry Contact (with additional accessory)		PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 point)		○	
Air Purification Kit		PTAHTP0	
Wi-Fi		PWFMD200	

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

ARNU18GTTB4 / ARNU24GTTB4



MODEL		UNIT	ARNU18GTTB4	ARNU24GTTB4
Cooling Capacity		kW	5.6	7.1
Heating Capacity		kW	6.3	7.1
Power Input (H / M / L)	Nominal	W	38 / 28 / 24	51 / 33 / 26
Dimensions (W x H x D)	Body	mm	1,180 x 132 x 450	1,180 x 132 x 450
	Shipping	mm	1,499 x 259 x 538	1,499 x 259 x 538
	Type	-	Cross Flow Fan	Cross Flow Fan
Fan	Motor Output x Number	W x No.	30 x 1	30 x 1
	Air Flow Rate (H / M / L)	m³/min	13.3 / 12.1 / 10.9	14.6 / 13.3 / 11.5
	Motor Type	-	BLDC	BLDC
Air Filter		-	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)
Weight	Body	kg	15.3	15.3
Sound Pressure Levels (H / M / L)		dB(A)	40 / 37 / 35	43 / 40 / 36
Sound Power Levels (H / M / L)		dB(A)	55 / 51 / 47	58 / 53 / 49
Power Supply		V / Ø / Hz	220-240 / 1 / 50	220-240 / 1 / 50
Transmission Cable		mm²	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C
Decoration Panel (Accessory)	Model Name	-	PT-TAHG0, PT-TAHW0, PT-TPHG0	PT-TAHG0, PT-TAHW0, PT-TPHG0
	Exterior Color	-	Noble White	Noble White
	RAL Code	-	RAL 9003	RAL 9003
	Net Dimensions (W x H x D)	mm	1,480 x 34 x 500	1,480 x 34 x 500
			1,420 x 34 x 500	1,420 x 34 x 500
			1,480 x 34 x 500	1,480 x 34 x 500
	Net Weight	kg	4.8 / 4.5 / 4.9	4.8 / 4.5 / 4.9

Note :
1. Performance tested under EN14511
2. Capacities are based on the following conditions
- Cooling : Indoor temp. 27℃ (80.6℉) DB / 19℃ (66.2℉) WB, Outdoor temp. 35℃ (95℉) DB / 24℃ (75.2℉) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20℃ (68℉) DB / 15℃ (59℉) WB, Outdoor temp. 7℃ (44.6℉) DB / 6℃ (42.8℉) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification

Accessories

CHASSIS	ARNU18GTTB4	ARNU24GTTB4
Drain Pump		○
Cassette Cover		-
Refrigerant Leak Detector		PRLDNVS0 (R410A), PLDRNV1S (R32)
EEV Kit		-
Multi-tenant Power Module		PINPMB001
Robot Cleaner		-
Pre Filter (Washable)		○
Ion Generator		-
CO ₂ Sensor		-
Ventilation Kit		-
IR Receiver		-
Zone Controller		-
Dry Contact (with additional accessory)		PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)
External Input (1 point)		○
Air Purification Kit		PTAHTP0
Wi-Fi		PWFMD200

※ ○ : Applied, - : Not applied
Option : Refer to model name in table



Features & Benefits

- Luxury round design can make a luxurious space with a round design considering side view.
- Perfect round air flow without blind spots.

Key Applications

- Retail
- Office
- Restaurant
- Hotel

CASSETTE		ROUND
Smart	Wi-Fi	○
Energy Efficiency	Human Detect Sensor	-
	Drain Pump	○
Comfort	Sleep Mode	○
	Timer (On / Off)	○
	Timer (Weekly)	○
	Two Thermistor Control	○
	Group Control	○

※ ○: Applied, -: Not applied

Slim and Compact Design

The height of the body has been reduced by 15%, saving space and maximizing the openness of the interior space.

Other Brand

384mm

※ Product : 48 kBtu

LG Round Cassette

330mm

15% less body height helps the ceilings remain high

Minimal Exposure Design

Pipes are brought together in one place to minimize exposure. Hanger covers hide installations to add a clean look.

Other Brand

● Drain Pipe

● Refrigerant Pipe

● Exposed Hanger

LG Round Cassette

● Piping in One Direction Only

● Hanger Cover

Perfect Round Air Flow

Perfect round flow without blind spots.

Other Brand


3 Way airflow with blind spot.

LG Round Cassette

Perfect circular airflow without blind spots.

Visible Air Flow


With crystal vein for 6-step precision control, you can send cool / heated air wherever you want.

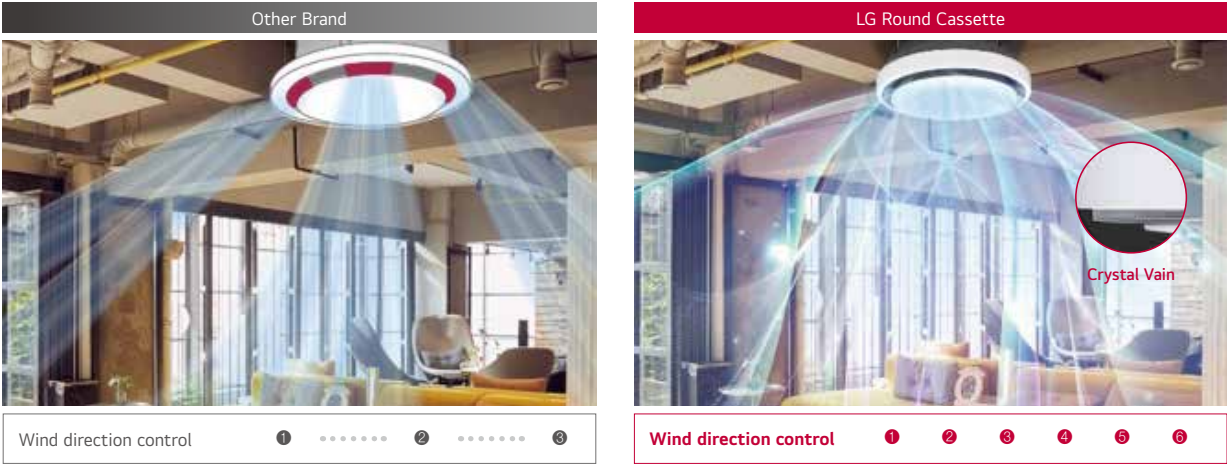

Powerful and Quiet Air Flow


3D fan increases airflow by 5% and noise reduction technology makes a quieter, more comfortable space.

Full 3D Fan, Air flow rate 5% ↑

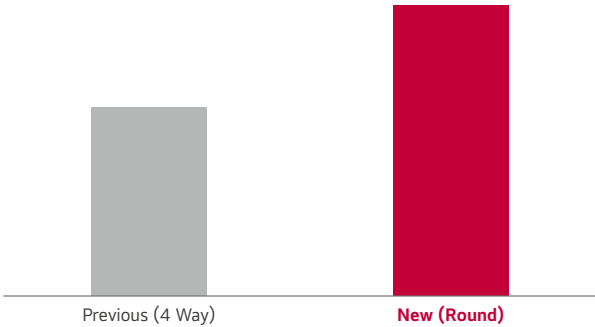

Full 3D Fan, Low noise

※ 48 kBTu, Low flow rate

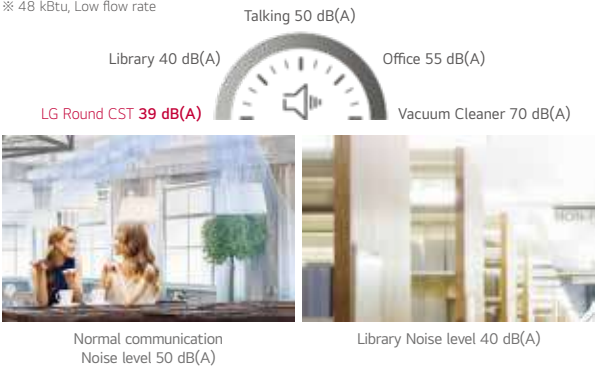

30% Faster in Cooling

With a larger airflow rate, cooling rate is faster than 30%.



※ Based on test results from LG chamber, this image is designed to help customers understand. Experimental environment: height 3.2m, 48 kBTu, cooling mode, high flow rate, horizontal air flow direction

ARNU24GTYA4 / ARNU36GTYA4 / ARNU48GTYA4



MODEL		UNIT	ARNU24GTYA4	ARNU36GTYA4	ARNU48GTYA4
Cooling Capacity		kW	7.1	10.6	14.1
Heating Capacity		kW	8.0	11.9	15.9
Power Input (H / M / L)	Nominal	W	44 / 36 / 29	63 / 47 / 36	98 / 70 / 44
Dimensions (W x H x D)	Body	mm	1,050 x 330 x 1,050	1,050 x 330 x 1,050	1,050 x 330 x 1,050
	Shipping	mm	1,137 x 395 x 1,132	1,137 x 395 x 1,132	1,137 x 395 x 1,132
Fan	Type	-	3D Turbo Fan	3D Turbo Fan	3D Turbo Fan
	Motor Output x Number	W	157 x 1	157 x 1	157 x 1
	Air Flow Rate (H / M / L)	m³/min	22 / 21 / 19	27 / 24 / 21	32 / 28 / 23
	Motor Type	-	BLDC	BLDC	BLDC
Air Filter		-	Long Life	Long Life	Long Life
Pipe Connections	Liquid Side	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Drain Pipe(Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)	Ø25 (1)
Weight	Body	kg	30	30	30
Sound Pressure Level (H / M / L)		dB(A)	39 / 37 / 34	43 / 39 / 37	47 / 44 / 39
Sound Power Level (H / M / L)		dB(A)	48 / 46 / 43	52 / 48 / 46	56 / 53 / 48
Power Supply		V / Ø / Hz	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50
Communication Cable (VCTF-SB)		mm² x cores	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

Note :
1. Performance tested under EN14511
2. Capacities are based on the following conditions
- Cooling : Indoor temp. 27℃ (80.6°F) DB / 19℃ (66.2°F) WB, Outdoor temp. 35℃ (95°F) DB / 24℃ (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20℃ (68°F) DB / 15℃ (59°F) WB, Outdoor temp. 7℃ (44.6°F) DB / 6℃ (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification

Accessories

CHASSIS	ARNU24GTYA4	ARNU36GTYA4	ARNU48GTYA4
Drain Pump		○	
Cassette Cover		-	
Refrigerant Leak Detector		PRLDNVS0 (R410A), PLDRNV1S (R32)	
EEV Kit		-	
Multi-tenant Power Module		PINPMB001	
Robot Cleaner		-	
Pre Filter (Washable)		○	
Ion Generator		-	
CO ₂ Sensor		-	
Ventilation Kit		-	
IR Receiver		-	
Zone Controller		-	
Dry Contact (with additional accessory)		PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 Point)		○	
Wi-Fi		PWFMD200	
Human Detection Sensor		-	
Floor Temperature Sensor		-	
Air Purification Kit		PTAHYP0	
Elevation Grille		-	

※ ○ : Applied, - : Not applied
Option : Refer to model name in table



Features & Benefits

- Easy and flexible duct adjusts air volume with External Static Pressure (ESP) control function.
- Minimalist visibility (Hidden within ceiling) to blend seamlessly into any interior

Key Applications

- Office
- Retail
- Hotel
- Residential building

	DUCT	HIGH	MIDDLE	LOW
Smart	Wi-Fi	○	○	○
Energy Efficiency	E.S.P Control	○	○	○
	Drain Pump	○	○	○
Comfort	Timer (On / Off)	○	○	○
	Timer (Weekly)	○	○	○
	Two Thermistor Control	○	○	○
	Group Control	○	○	○


※ ○: Applied, - : Not applied

Wi-Fi Control

Anytime, anywhere access to the unit with Android & iOS-based smartphones.

ThinQ

Search "ThinQ" on Google market or the App Store to download the app.

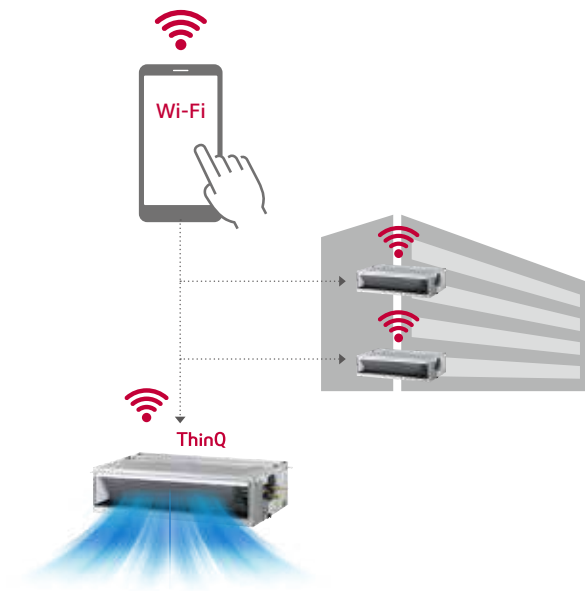

Easy Registration and Log-in

Follow the easy set-up steps that will activate ThinQ's user-friendly features.



Simple operation for various functions



On / Off, Current Temp



Mode, Set Temp





Zone Control

※ For our policy of continuous ThinQ App improvement, specification, design and features are subject to change without prior notice.


External Static Pressure (ESP) Control

Users have easy access to air volume selection via remote controller using the ESP control function. The BLDC motor can control fan speed and air flow. No additional accessories are necessary to control air flow.

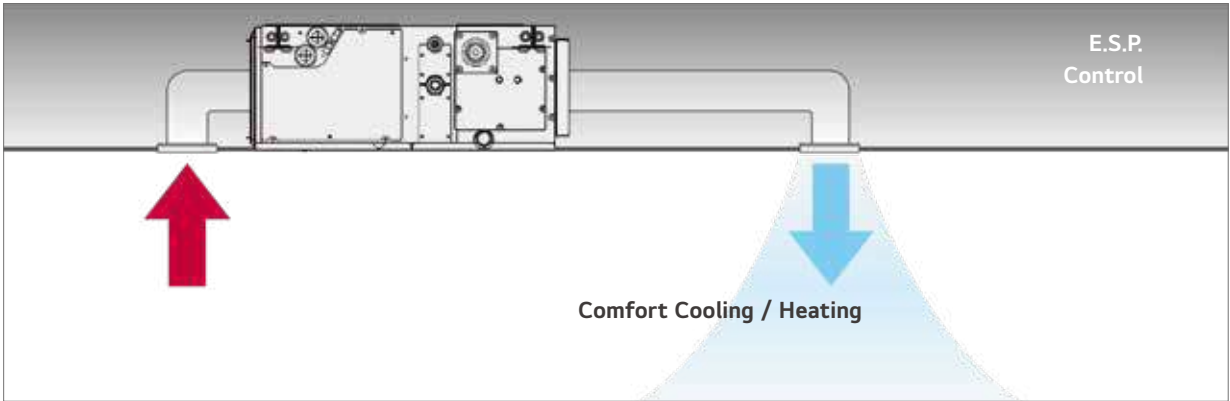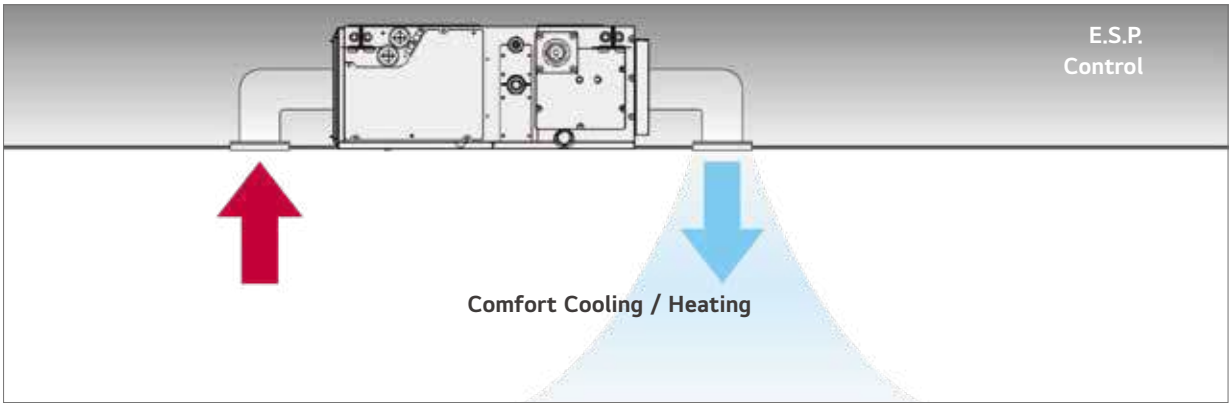

Static Pressure 11-Step Control


Depending on the installation environment, LG's ceiling concealed duct controls the static pressure with 11 steps to provide maximized comfort to any environment.

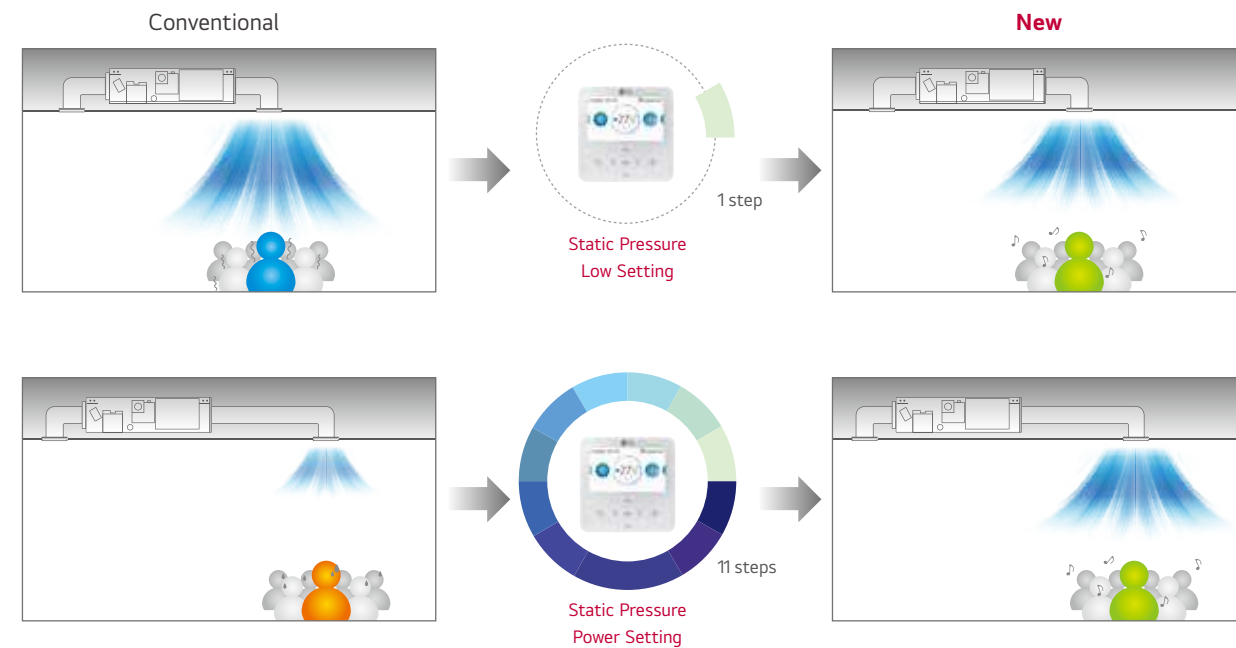


Energy Monitoring

Accumulated electric energy of the indoor unit can be identified with the wired remote control, as well as with the central controller. This function is an advantage for energy management.

Install Scene

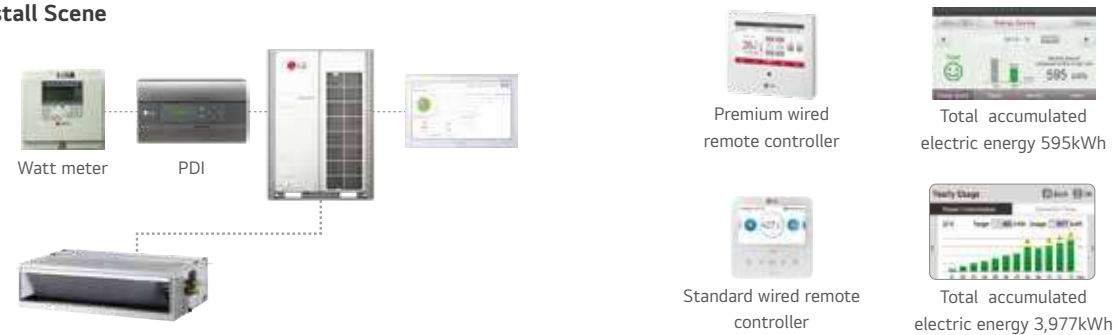

Multistory building application

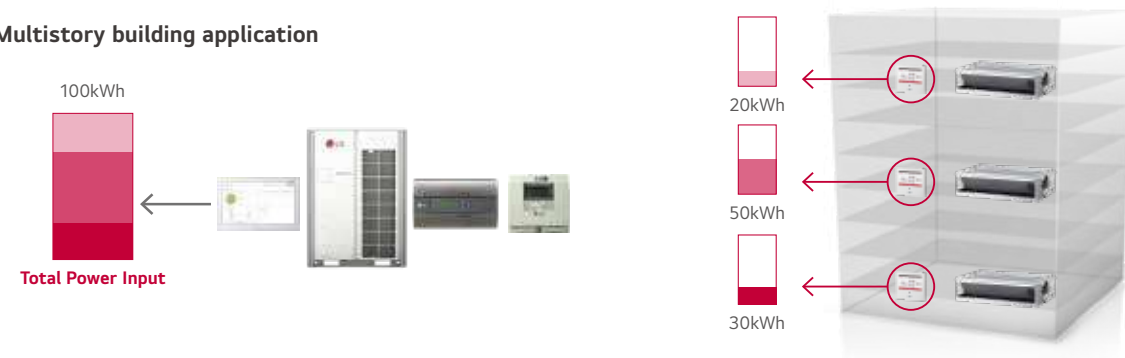


※ Outdoor unit's accumulated electric energy / using rate of individual indoor unit + indoor unit's accumulated electric energy is displayed in wired remote controller, only when central controller, digital integrating electricity meter and PDI are installed and PDI, outdoor unit and indoor unit are connected with power wire. Only total accumulated electric energy is displayed in standard wired remote controller. In premium wired remote controller, that are displayed into week / month / year.

Safe Plus Insulation

Why LG Safe Plus Insulation?

Safe Plus Insulation is an antimicrobial treatment that is applied to LG MULTI V Indoor unit internal insulation components to resist bacterial growth, providing cleaner and fresher airflow to customers.

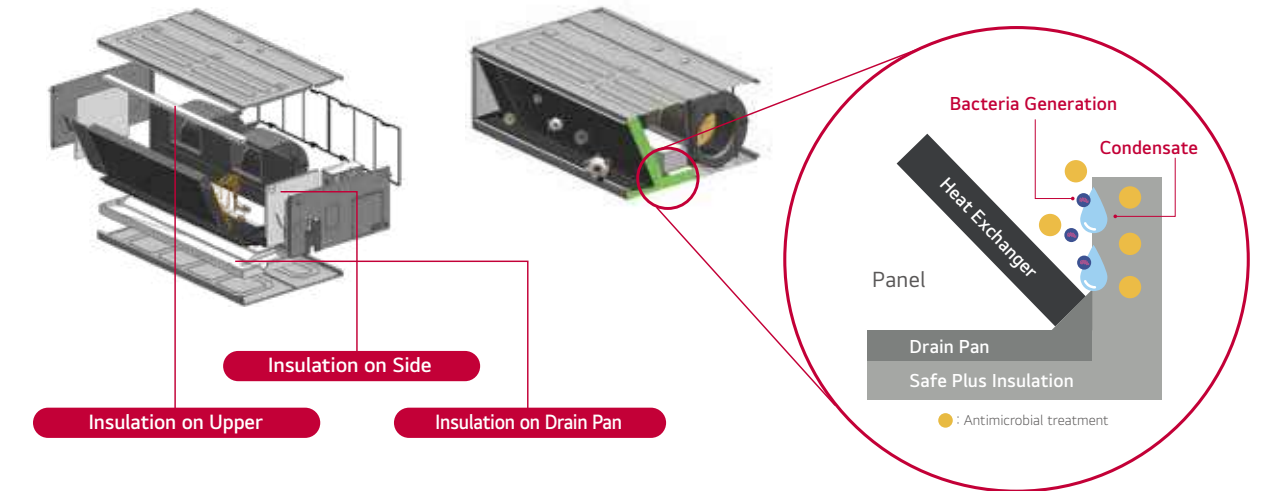

What's the hygiene inside of your air conditioner?




Example of EPS Pollution case.

Today's air conditioners all generally provide fast cooling and energy saving features, as well as the ability to filter bacteria, dust and mold for purified air. However, how hygienic is the inside of the air conditioner? If the inside of the air conditioner is contaminated, what can you do?

Antimicrobial treatment on EPS (Cabinet, Drain Pan, Air Guide, Insulator, Supporter) for Air Conditioners is the first applied technology in the world, which only LG has access to.

Multiple Room Operation

Using a spiral duct (embedded or flexible type) and a stream chamber, it is possible to operate cooling / heating for several rooms simultaneously.

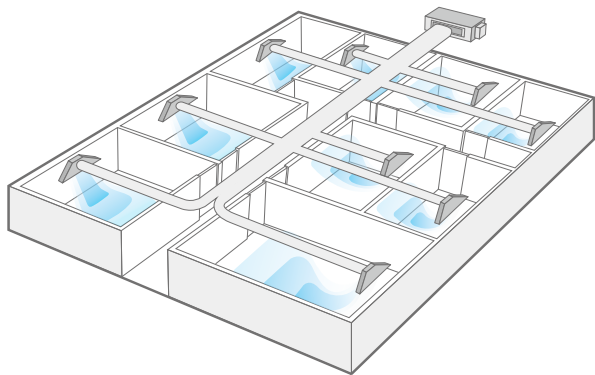

Filter Alert

The alarm is activated when the filter needs to be cleaned, and the time remaining for cleaning is displayed on the screen.

Remain Time for Indoor Filter Cleaning + Alarm



Remain time for indoor filter cleaning 2,400hr.



Standard wired remote controller



Remain time for indoor filter cleaning 1,729hr.




Premium wired remote controller

Flexible Installation (Low Static Duct Slim Only)


The alarm is activated when the filter needs to be cleaned, and the time remaining for cleaning is displayed on the screen.

Air intake at the rear or bottom

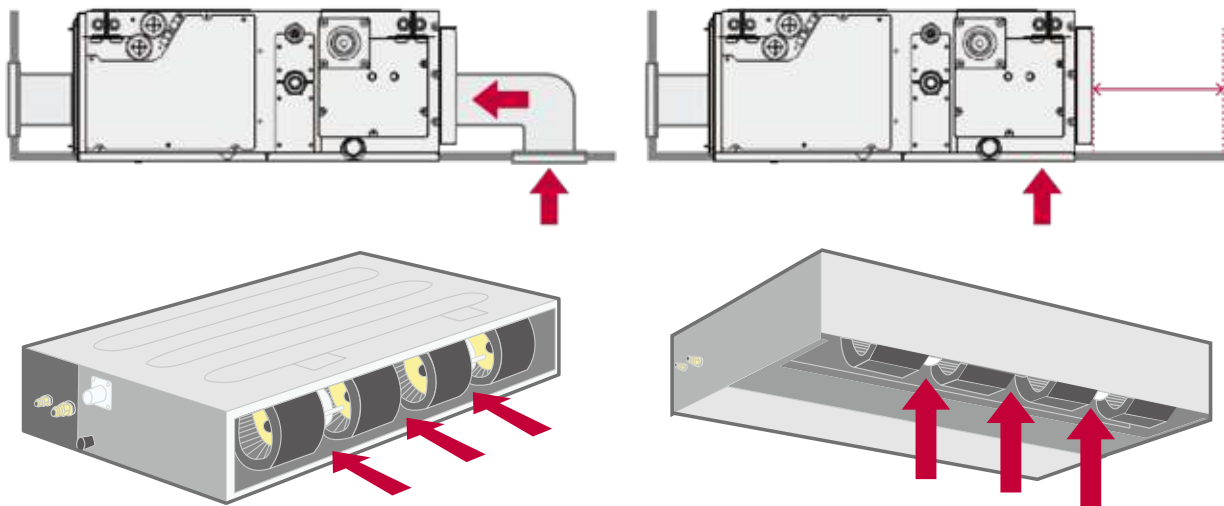


Minimized Height (For Mid Static Duct)

Mid Static Ducts provide the ideal solution for installations in limited spaces.

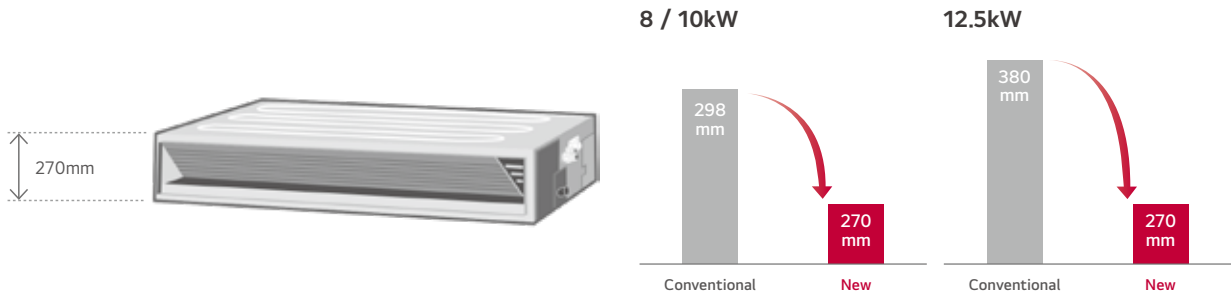

Two Thermistors Control


The indoor temperature can be checked using the thermistors in the remote controller as well as from the indoor unit. There may be a significant difference between ceiling and floor air temperature. Two thermistors can optimise indoor air temperature for a more comfortable environment.

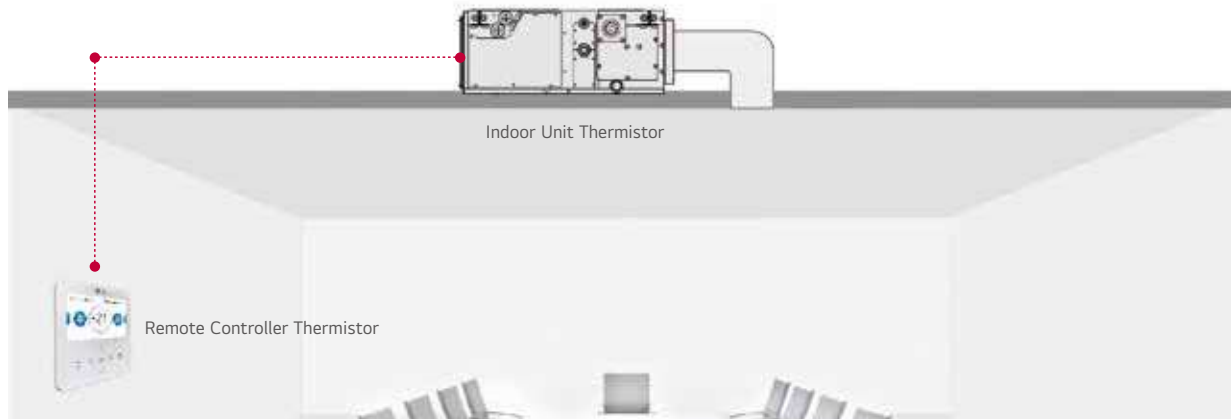

1 Point External Input (On / Off Control)

The indoor unit can be controlled by external devices without dry contact, saving customers on the cost of installation.

Connection between an indoor unit and external devices directly

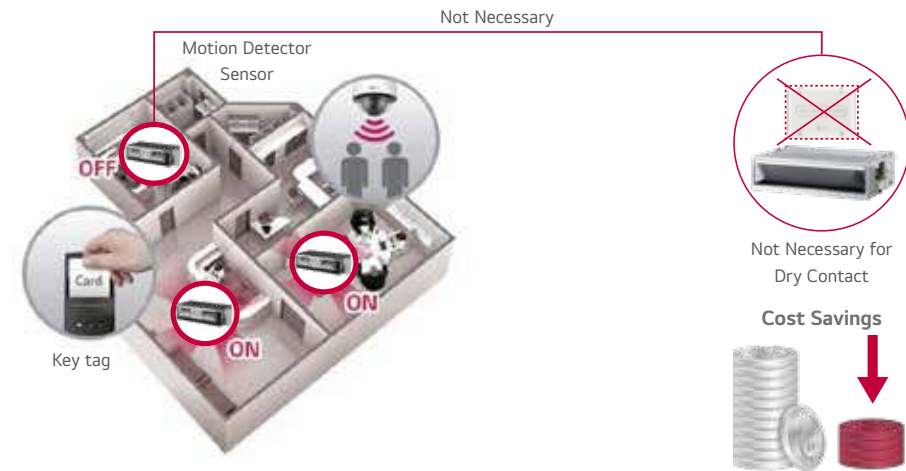

※ In case of needing more functions beside on / off control, a dry contact is required to be installed.

ARNU07GM1A4 / ARNU09GM1A4
ARNU12GM1A4 / ARNU15GM1A4
ARNU18GM1A4 / ARNU24GM1A4



MODEL		UNIT	ARNU07GM1A4	ARNU09GM1A4	ARNU12GM1A4	ARNU15GM1A4	ARNU18GM1A4	ARNU24GM1A4
Cooling Capacity		kW	2.2	2.8	3.6	4.5	5.6	7.1
Heating Capacity		kW	2.5	3.2	4.0	5.0	6.3	8.0
Power Input (H / M / L)	Nominal	W	39 / 30 / 25	40 / 32 / 26	46 / 38 / 31	67 / 53 / 46	85 / 63 / 55	91 / 74 / 58
Dimensions (W x H x D)	Body	mm	900 x 270 x 700	900 x 270 x 700	900 x 270 x 700	900 x 270 x 700	900 x 270 x 700	900 x 270 x 700
	Shipping	mm	1,100 x 338 x 773	1,100 x 338 x 773	1,100 x 338 x 773	1,100 x 338 x 773	1,100 x 338 x 773	1,100 x 338 x 773
Fan	Type	-	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan
	Motor Output x Number	W x No.	136 x 1	136 x 1	136 x 1	136 x 1	136 x 1	136 x 1
	Air Flow Rate (H / M / L)	m³/min	9.0 / 7.5 / 6.0	9.5 / 7.5 / 6.0	11.0 / 9.0 / 7.0	16.0 / 12.0 / 9.0	17.0 / 14.5 / 12.0	19.0 / 16.0 / 14.0
	External Static Pressure (High Mode)	mmAq (Pa)	6 (59)	6 (59)	6 (59)	6 (59)	6 (59)	6 (59)
	Air Flow Rate (H / M / L) (Standard Mode)	m³/min	9.0 / 7.5 / 6.0	9.5 / 7.5 / 6.0	11.0 / 9.0 / 7.0	16.0 / 12.0 / 9.0	17.0 / 14.5 / 12.0	19.0 / 16.0 / 14.0
	External Static Pressure (Standard Mode)	mmAq (Pa)	2.5 (25)	2.5 (25)	2.5 (25)	2.5 (25)	2.5 (25)	2.5 (25)
	External Static Pressure (Min ~ Max)	mmAq (Pa)	2 (20) ~ 15 (147)	2 (20) ~ 15 (147)	2 (20) ~ 15 (147)	2 (20) ~ 15 (147)	2 (20) ~ 15 (147)	2 (20) ~ 15 (147)
	Motor Type	-	BLDC	BLDC	BLDC	BLDC	BLDC	BLDC
Air Filter		-	Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	25 (1)	25 (1)	Ø25 (1)	Ø25 (1)	Ø25 (1)	Ø25 (1)
Weight	Body	kg	25.0	25.0	25.0	25.0	25.0	25.9
Sound Pressure Levels (H / M / L)		dB(A)	26 / 24 / 23	27 / 25 / 23	27 / 25 / 23	30 / 27 / 23	31 / 28 / 25	32 / 29 / 26
Sound Power Levels (H / M / L)		dB(A)	55 / 54 / 51	55 / 54 / 52	56 / 54 / 52	59 / 57 / 55	59 / 57 / 55	59 / 58 / 56
Power Supply		V / Ø / Hz	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50
Transmission Cable		mm²	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0~1.5 x 2C

Note :
1. Performance tested under EN14511
2. Capacities are based on the following conditions
- Cooling : Indoor temp. 27℃ (80.6°F) DB / 19℃ (66.2°F) WB, Outdoor temp. 35℃ (95°F) DB / 24℃ (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20℃ (68°F) DB / 15℃ (59°F) WB, Outdoor temp. 7℃ (44.6°F) DB / 6℃ (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification

Accessories

CHASSIS	ARNU07GM1A4	ARNU09GM1A4	ARNU12GM1A4	ARNU15GM1A4	ARNU18GM1A4	ARNU24GM1A4
Drain Pump			○			
Cassette Cover			-			
Refrigerant Leak Detector			PRLDNVS0 (R410A), PLDRNV1S (R32)			
EEV Kit			PRGK024A0 (~5.6kW)			
Multi-tenant Power Module			PINPMB001			
Robot Cleaner			-			
Pre Filter (Washable)			○			
Ion Generator			-			
CO ₂ Sensor			-			
Ventilation Kit			-			
IR Receiver			PWLRVN000			
Zone Controller			ABZCA			
Dry Contact (with additional accessory)			PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)			
External Input (1 point)			○			
Wi-Fi			PWFMD200			

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

ARNU28GM2A4 / ARNU36GM2A4
ARNU42GM2A4 / ARNU48GM3A4
ARNU54GM3A4



MODEL		UNIT	ARNU28GM2A4	ARNU36GM2A4	ARNU42GM2A4	ARNU48GM3A4	ARNU54GM3A4
Cooling Capacity		kW	8.2	10.6	12.3	14.1	15.8
Heating Capacity		kW	9.2	11.9	13.8	15.9	18.0
Power Input (H / M / L)	Nominal	W	123 / 81 / 57	184 / 123 / 81	231 / 162 / 111	172 / 105 / 65	260 / 215 / 172
Dimensions (W x H x D)	Body	mm	1,250 x 270 x 700	1,250 x 270 x 700	1,250 x 270 x 700	1,250 x 360 x 700	1,250 x 360 x 700
	Shipping	mm	1,450 x 338 x 773	1,450 x 338 x 773	1,450 x 338 x 773	1,450 x 428 x 773	1,450 x 428 x 773
Fan	Type	-	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan
	Motor Output x Number	W x No.	350 x 1	350 x 1	350 x 1	400 x 1	400 x 1
	Air Flow Rate (H / M / L)	m³/min	28.0 / 24.0 / 21.0	32.0 / 28.0 / 24.0	38.0 / 33.0 / 28.0	40.0 / 34.0 / 28.0	50.0 / 45.0 / 40.0
	External Static Pressure (High Mode)	mmAq (Pa)	6 (59)	6 (59)	6 (59)	6 (59)	6 (59)
	Air Flow Rate (H / M / L) (Standard Mode)	m³/min	28.0 / 24.0 / 21.0	32.0 / 28.0 / 24.0	38.0 / 33.0 / 28.0	40.0 / 34.0 / 28.0	50.0 / 45.0 / 40.0
	External Static Pressure (Standard Mode)	mmAq (Pa)	5 (49)	5 (49)	5 (49)	5 (49)	5 (49)
	External Static Pressure (Min ~ Max)	mmAq (Pa)	4 (39) ~ 18 (176)	4 (39) ~ 18 (176)	4 (39) ~ 18 (176)	4 (39) ~ 1 5(147)	4 (39) ~ 15 (147)
	Motor Type	-	BLDC	BLDC	BLDC	BLDC	BLDC
Air Filter		-	Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø19.05 (3/4)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)	Ø25 (1)	Ø25 (1)	Ø25 (1)
Weight	Body	kg	36.0	36.0	37.2	42.2	42.2
Sound Pressure Levels (H / M / L)		dB(A)	38 / 36 / 35	40 / 38 / 36	42 / 41 / 39	41 / 38 / 37	42 / 41 / 40
Sound Power Levels (H / M / L)		dB(A)	59 / 57 / 55	60 / 59 / 57	62 / 61 / 60	63 / 60 / 59	65 / 64 / 62
Power Supply		V / Ø / Hz	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50
Transmission Cable		mm²	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

Note :
1. Performance tested under EN14511
2. Capacities are based on the following conditions
- Cooling : Indoor temp. 27℃ (80.6°F) DB / 19℃ (66.2°F) WB, Outdoor temp. 35℃ (95°F) DB / 24℃ (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20℃ (68°F) DB / 15℃ (59°F) WB, Outdoor temp. 7℃ (44.6°F) DB / 6℃ (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification

Accessories

CHASSIS	ARNU28GM2A4	ARNU36GM2A4	ARNU42GM2A4	ARNU48GM3A4	ARNU54GM3A4
Drain Pump			○		
Cassette Cover			-		
Refrigerant Leak Detector			PRLDNVS0 (R410A), PLDRNV1S (R32)		
EEV Kit			-		
Multi-tenant Power Module			PINPMB001		
Robot Cleaner			-		
Pre Filter (Washable)			○		
Ion Generator			-		
CO ₂ Sensor			-		
Ventilation Kit			-		
IR Receiver			PWLRVN000		
Zone Controller			ABZCA		
Dry Contact (with additional accessory)			PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)		
External Input (1 point)			○		
Wi-Fi			PWFMD200		

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

ARNU76GB8A4 / ARNU96GB8A4



MODEL		UNIT	ARNU76GB8A4	ARNU96GB8A4
Cooling Capacity		kW	22.4	28.0
Heating Capacity		kW	25.2	31.5
Power Input (H / M / L)	Nominal	W	765 / 500 / 500	800 / 750 / 750
Dimensions (W x H x D)	Body	mm	1,562 x 460 x 688	1,562 x 460 x 688
	Shipping	mm	1,806 x 537 x 825	1,806 x 537 x 825
Fan	Type	-	Sirocco Fan	Sirocco Fan
	Motor Output x Number	W x No.	375 x 2	375 x 2
	Air Flow Rate (H / M / L) (High Mode-Factory Set)	m³/min	60.0 / 50.0 / 50.0	72.0 / 64.0 / 64.0
	External Static Pressure (High Mode)	mmAq (Pa)	22 (216)	22 (216)
	Air Flow Rate (H / M / L) (Standard Mode)	m³/min	64.0 / 50.0 / 50.0	76.0 / 64.0 / 64.0
	External Static Pressure (Standard Mode)	mmAq (Pa)	15 (147)	15 (147)
	External Static Pressure (Min ~ Max)	mmAq (Pa)	10 (98) ~ 25 (245)	10 (98) ~ 25 (245)
	Motor Type	-	BLDC	BLDC
Air Filter		-	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø19.05 (3/4)	Ø22.2 (7/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)
Weight	Body	kg	87.0	87.0
Sound Pressure Levels (H / M / L)		dB(A)	45 / 41 / 40	47 / 42 / 41
Sound Power Levels (H / M / L)		dB(A)	67 / 62 / 60	68 / 64 / 62
Power Supply		V / Ø / Hz	220-240 / 1 / 50	220-240 / 1 / 50
Transmission Cable		mm²	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

Note :
1. Performance tested under EN14511
2. Capacities are based on the following conditions
- Cooling : Indoor temp. 27℃ (80.6°F) DB / 19℃ (66.2°F) WB, Outdoor temp. 35℃ (95°F) DB / 24℃ (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20℃ (68°F) DB / 15℃ (59°F) WB, Outdoor temp. 7℃ (44.6°F) DB / 6℃ (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification

Accessories

CHASSIS	ARNU76GB8A4	ARNU96GB8A4
Drain Pump	○	
Cassette Cover	-	
Refrigerant Leak Detector	PRLDNVS0 (R410A), PLDRNV1S (R32)	
EEV Kit	○	
Multi-tenant Power Module	PINPMB001	
Robot Cleaner	-	
Pre Filter (Washable)	○	
Ion Generator	-	
CO ₂ Sensor	-	
Ventilation Kit	-	
IR Receiver	PWLRVN000	
Zone Controller	ABZCA	
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 point)	○	
Wi-Fi	PWFMDD200	

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

ARNU05GL4G4 / ARNU07GL4G4
ARNU09GL4G4 / ARNU12GL5G4



MODEL		UNIT	ARNU05GL4G4	ARNU07GL4G4	ARNU09GL4G4	ARNU12GL5G4
Cooling Capacity		kW	1.8	2.2	2.8	3.6
Heating Capacity		kW	2.2	2.5	3.2	4
Power Input (H / M / L)	Nominal	W	15 / 13 / 11	28 / 24 / 21	28 / 24 / 21	43 / 38 / 35
Dimensions (W x H x D)	Body	mm	700 x 190 x 460	700 x 190 x 460	700 x 190 x 460	900 x 190 x 460
	Shipping	mm	925 x 255 x 561	925 x 255 x 561	925 x 255 x 561	1,125 x 255 x 561
Fan	Type	-	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan
	Motor Output x Number	W x No.	19 x 1	19 x 1	19 x 1	19 x 1 + 5 x 1
	Air Flow Rate (H / M / L) (High Mode-Factory Set)	m³/min	7.0 / 6.5 / 5.5	7.5 / 6.5 / 5.5	9.0 / 7.0 / 5.5	10.0 / 8.5 / 7.0
	External Static Pressure (High Mode)	mmAq (Pa)	1 (10)	1 (10)	1 (10)	1 (10)
	Air Flow Rate (H / M / L) (Standard Mode)	m³/min	7.0 / 6.5 / 5.5	7.5 / 6.5 / 5.5	9.0 / 7.0 / 5.5	10.0 / 8.5 / 7.0
	External Static Pressure (Standard Mode)	mmAq (Pa)	0 (0)	0 (0)	0 (0)	0 (0)
	External Static Pressure (Min ~ Max)	mmAq (Pa)	0 (0) ~ 5 (49)	0 (0) ~ 5 (49)	0 (0) ~ 5 (49)	0 (0) ~ 5 (49)
	Motor Type	-	BLDC	BLDC	BLDC	BLDC
Air Filter		-	Pre Filter	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	6.35 (1/4)	6.35 (1/4)	6.35 (1/4)	6.35 (1/4)
	Gas Side	mm (inch)	12.7 (1/2)	12.7 (1/2)	12.7 (1/2)	12.7 (1/2)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25.4 (1)	Ø25.4 (1)	Ø25.4 (1)	Ø25.4 (1)
Weight	Body	kg	14.6	14.6	14.6	20
Sound Pressure Levels (H / M / L)		dB(A)	25 / 24 / 22	26 / 24 / 22	28 / 25 / 22	29 / 27 / 25
Sound Power Levels (H / M / L)		dB(A)	32.5 / 31.4 / 29.6	34 / 31.4 / 29.6	36.1 / 32.5 / 29.6	35.1 / 32.7 / 30.7
Power Supply		V / Ø / Hz	220-230-240 / 1 / 50-60	220-230-240 / 1 / 50-60	220-230-240 / 1 / 50-60	220-230-240 / 1 / 50-60
Transmission Cable		mm²	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

Note :
1. Performance tested under EN14511
2. Capacities are based on the following conditions
- Cooling : Indoor temp. 27℃ (80.6°F) DB / 19℃ (66.2°F) WB, Outdoor temp. 35℃ (95°F) DB / 24℃ (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20℃ (68°F) DB / 15℃ (59°F) WB, Outdoor temp. 7℃ (44.6°F) DB / 6℃ (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification

Accessories

CHASSIS	ARNU05GL4G4	ARNU07GL4G4	ARNU09GL4G4	ARNU12GL5G4
Drain Pump	○			
Cassette Cover	-			
Refrigerant Leak Detector	PRLDNVS0 (R410A), PLDRNV1S (R32)			
EEV Kit	PRGK024A0 (ARNU**GL4G4 Only)			
Multi-tenant Power Module	PINPMB001			
Robot Cleaner	-			
Pre Filter (Washable)	○			
Ion Generator	-			
CO ₂ Sensor	-			
Ventilation Kit	-			
IR Receiver	PWLRVN000			
Zone Controller	-			
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)			
External Input (1 point)	○			
Wi-Fi	PWFMDD200			

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

ARNU15GL5G4 / ARNU18GL5G4
ARNU21GL6G4 / ARNU24GL6G4



MODEL		UNIT	ARNU15GL5G4	ARNU18GL5G4	ARNU21GL6G4	ARNU24GL6G4
Cooling Capacity		kW	4.5	5.6	6.3	7.1
Heating Capacity		kW	5	6.3	7.1	8
Power Input (H / M / L)	Nominal	W	54 / 45 / 38	57 / 39 / 30	65 / 50 / 42	81 / 59 / 43
Dimensions (W x H x D)	Body	mm	900 x 190 x 460	900 x 190 x 460	1,100 x 190 x 460	1,100 x 190 x 460
	Shipping	mm	1,125 x 255 x 561	1,125 x 255 x 561	1,325 x 255 x 561	1,325 x 255 x 561
Fan	Type	-	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan
	Motor Output x Number	W x No.	19 x 1 + 5 x 1	19 x 1 + 5 x 1	19 x 2	19 x 2
	Air Flow Rate (H / M / L) (High Mode-Factory Set)	m³/min	12.5 / 10.0 / 8.5	15.0 / 12.5 / 10.0	17.5 / 14.0 / 12.0	20.0 / 16.0 / 12.0
	External Static Pressure (High Mode)	mmAq (Pa)	1 (10)	1 (10)	1 (10)	1 (10)
	Air Flow Rate (H / M / L) (Standard Mode)	m³/min	12.5 / 10.0 / 8.5	15.0 / 12.5 / 10.0	17.5 / 14.0 / 12.0	20.0 / 16.0 / 12.0
	External Static Pressure (Standard Mode)	mmAq (Pa)	0 (0)	0 (0)	0 (0)	0 (0)
	External Static Pressure (Min ~ Max)	mmAq (Pa)	0 (0) ~ 5 (49)	0 (0) ~ 5 (49)	0 (0) ~ 5 (49)	0 (0) ~ 5 (49)
	Motor Type	-	BLDC	BLDC	BLDC	BLDC
	Air Filter	-	Pre Filter	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	6.35 (1/4)	6.35 (1/4)	9.52 (3/8)	9.52 (3/8)
	Gas Side	mm (inch)	12.7 (1/2)	12.7 (1/2)	15.88 (5/8)	15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25.4 (1)	Ø25.4 (1)	Ø25.4 (1)	Ø25.4 (1)
Weight	Body	kg	20	20	22	22
Sound Pressure Levels (H / M / L)		dB(A)	32 / 29 / 27	35 / 32 / 29	35 / 30 / 29	36 / 33 / 29
Sound Power Levels (H / M / L)		dB(A)	38.4 / 35.1 / 32.7	42.1 / 38.4 / 35.1	42.5 / 38.3 / 36.0	45.0 / 40.7 / 36.0
Power Supply		V / Ø / Hz	220-230-240 / 1 / 50-60	220-230-240 / 1 / 50-60	220-230-240 / 1 / 50-60	220-230-240 / 1 / 50-60
Transmission Cable		mm²	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

Note :
1. Performance tested under EN14511
2. Capacities are based on the following conditions
- Cooling : Indoor temp. 27℃ (80.6℉) DB / 19℃ (66.2℉) WB, Outdoor temp. 35℃ (95℉) DB / 24℃ (75.2℉) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20℃ (68℉) DB / 15℃ (59℉) WB, Outdoor temp. 7℃ (44.6℉) DB / 6℃ (42.8℉) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification

Accessories

CHASSIS	ARNU15GL5G4	ARNU18GL5G4	ARNU21GL6G4	ARNU24GL6G4
Drain Pump	○			
Cassette Cover	-			
Refrigerant Leak Detector	PRLDNVS0 (R410A), PLDRNV1S (R32)			
EEV Kit	-			
Multi-tenant Power Module	PINPMB001			
Robot Cleaner	-			
Pre Filter (Washable)	○			
Ion Generator	-			
CO ₂ Sensor	-			
Ventilation Kit	-			
IR Receiver	PWLRVN000			
Zone Controller	-			
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)			
External Input (1 point)	○			
Wi-Fi	PWFMDD200			

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

ARNU07GM2A4 / ARNU09GM2A4
ARNU12GM2A4 / ARNU15GM2A4
ARNU18GM3A4



MODEL		UNIT	ARNU07GM2A4	ARNU09GM2A4	ARNU12GM2A4	ARNU15GM2A4	ARNU18GM3A4
Cooling Capacity		kW	2.2	2.8	3.6	4.5	5.6
Heating Capacity		kW	2.5	3.2	4.0	5.0	6.3
Power Input (H / M / L)		W	32 / 29 / 27	32 / 29 / 27	33 / 30 / 28	33 / 30 / 28	97 / 70 / 51
Dimensions (W x H x D)	Body	mm	1,250 x 270 x 700	1,250 x 270 x 700	1,250 x 270 x 700	1,250 x 270 x 700	1,250 x 360 x 700
	Type	-	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan
Fan	Motor Output x Number	W x No.	350 x 1	350 x 1	350 x 1	350 x 1	500 x 1
	Air Flow Rate (H / M / L) (High static Mode - factory set)	m³/min	13.3 / 9.4 / 6.8	13.3 / 9.4 / 6.8	14.8 / 10.2 / 7.4	14.8 / 10.2 / 7.4	32.7 / 26.7 / 23.0
	External Static Pressure	mmAq (Pa)	6 (59)	6 (59)	6 (59)	6 (59)	6 (59)
	Air Flow Rate (H / M / L) (Standard Mode)	m³/min	13.3 / 9.4 / 6.8	13.3 / 9.4 / 6.8	14.8 / 10.2 / 7.4	14.8 / 10.2 / 7.4	32.7 / 26.7 / 23.0
	External Static Pressure	mmAq (Pa)	5 (49)	5 (49)	5 (49)	5 (49)	5 (49)
	External Static Pressure (Min ~ Max)	mmAq (Pa)	4 (39) ~ 18 (177)	4 (39) ~ 18 (177)	4 (39) ~ 18 (177)	4 (39) ~ 18 (177)	4 (39) ~ 20 (196)
	Motor type	-	BLDC	BLDC	BLDC	BLDC	BLDC
	Air Filter	-	-	-	-	-	-
Pipe Connections	Liquid Side	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	25 (1)	25 (1)	25 (1)	25 (1)	25 (1)
Net Weight		kg	36	36	36	36	42.2
Sound Pressure Levels (H / M / L)		dB(A)	33 / 33 / 32	33 / 33 / 32	34 / 33 / 32	34 / 33 / 32	38 / 36 / 34
Sound Power Levels (H / M / L)		dB(A)	52 / 52 / 52	52 / 52 / 52	53 / 52 / 52	53 / 52 / 52	52 / 51 / 50
Power Supply		V / Ø / Hz	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50
Transmission Cable		mm²	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

Note :
1. Due to our policy of innovation some specifications may be changed without notification.
2. Wiring cable size must comply with the applicable local and national code. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
3. Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the reverberation rooms by ISO 3741 standard. Therefore, these values can be increased owing to ambient conditions during operation.
4. Capacities are net capacities and based on the following conditions. Refer to the Outdoor Unit Specifications for calculating the real capacity.
- Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
- Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
- Interconnected Pipe is standard length and difference of Elevation (Outdoor ~ Indoor Unit) is Zero.
5. Sound levels are measured at 50Pa External Static Pressure condition.
6. * : Air flow rate could be different in accordance with External Static Pressure and setting value.

Accessories

CHASSIS	ARNU07GM2A4	ARNU09GM2A4	ARNU12GM2A4	ARNU15GM2A4	ARNU18GM3A4
Drain Pump	○				
Cassette Cover	-				
Refrigerant Leak Detector	PRLDNVS0 (R410A), PLDRNV1S (R32)				
EEV Kit	-				
Multi-tenant Power Module	PINPMB001				
Robot Cleaner	-				
Pre Filter (Washable)	○				
Ion Generator	-				
CO ₂ Sensor	-				
Ventilation Kit	-				
IR Receiver	PWLRVN000				
Zone Controller	ABZCA				
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)				
External Input (1 point)	○				
Wi-Fi	PWFMDD200				

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

ARNU24GM3A4 / ARNU28GM3A4
ARNU36GB8A4 / ARNU42GB8A4
ARNU48GB8A4



MODEL		UNIT	ARNU24GM3A4	ARNU28GM3A4	ARNU36GB8A4	ARNU42GB8A4	ARNU48GB8A4
Cooling Capacity		kW	7.1	8.2	10.6	12.3	14.1
Heating Capacity		kW	8.0	9.2	11.9	13.8	15.9
Power Input (H / M / L)		W	109 / 83 / 60	109 / 83 / 60	420 / 403 / 478	528 / 497 / 465	538 / 505 / 482
Dimensions (W x H x D)	Body	mm	1,250 × 360 × 700	1,250 × 360 × 700	1,562 × 460 × 688	1,562 × 460 × 688	1,562 × 460 × 688
	Type	-	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan
Fan	Motor Output x Number	W x No.	500 x 1	500 x 1	375 x 2	375 x 2	375 x 2
	Air Flow Rate (H / M / L) (High static Mode - factory set)	m³/min	35.5 / 30.6 / 26.2	35.5 / 30.6 / 26.2	49.0 / 37.3 / 30.2	54.2 / 41.3 / 31.8	57.2 / 43.0 / 34.0
	External Static Pressure	mmAq (Pa)	6 (59)	6 (59)	18 (176)	18 (176)	18 (176)
	Air Flow Rate (H / M / L) (Standard Mode)	m³/min	35.5 / 30.6 / 26.2	35.5 / 30.6 / 26.2	53.7 / 49.5 / 43.9	55.6 / 50.6 / 45.0	58.0 / 52.3 / 47.3
	External Static Pressure	mmAq (Pa)	5 (49)	5 (49)	9 (88)	9 (88)	9 (88)
	External Static Pressure (Min ~ Max)	mmAq (Pa)	4 (39) ~ 20 (196)	4 (39) ~ 20 (196)	9 (98) ~ 25 (245)	9 (98) ~ 25 (245)	9 (98) ~ 25 (245)
	Motor type	-	BLDC	BLDC	BLDC	BLDC	BLDC
Air Filter		-	-	-	-	-	-
Pipe Connections	Liquid Side	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05 (3/4)
	Drain Pipe (Internal Dia.)	mm (inch)	25 (1)	25 (1)	25 (1)	25 (1)	25 (1)
Net Weight		kg	42.2	42.2	87	87	87
Sound Pressure Levels (H / M / L)		dB(A)	39 / 37 / 35	39 / 37 / 35	46 / 45 / 42	47 / 46 / 43	47 / 46 / 44
Sound Power Levels (H / M / L)		dB(A)	53 / 52 / 51	53 / 52 / 51	65 / 64 / 62	66 / 65 / 63	66 / 65 / 64
Power Supply		V / Ø / Hz	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50
Transmission Cable		mm²	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

Note :

1. Due to our policy of innovation some specifications may be changed without notification.

2. Wiring cable size must comply with the applicable local and national code. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.

3. Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the reverberation rooms by ISO 3741 standard. Therefore, these values can be increased owing to ambient conditions during operation.

4. Capacities are net capacities and based on the following conditions. Refer to the Outdoor Unit Specifications for calculating the real capacity.

- Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB

- Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB

- Interconnected Pipe is standard length and difference of Elevation (Outdoor ~ Indoor Unit) is Zero.

5. Sound levels are measured at 50Pa External Static Pressure condition.

6. * : Air flow rate could be different in accordance with External Static Pressure and setting value.


Accessories

CHASSIS	ARNU24GM3A4	ARNU28GM3A4	ARNU36GB8A4	ARNU42GB8A4	ARNU48GB8A4
Drain Pump			○		
Cassette Cover			-		
Refrigerant Leak Detector			PRLDNVS0 (R410A), PLDRNV1S (R32)		
EEV Kit			-		
Multi-tenant Power Module			PINPMB001		
Robot Cleaner			-		
Pre Filter (Washable)			○		
Ion Generator			-		
CO ₂ Sensor			-		
Ventilation Kit			-		
IR Receiver			PWLRVN000		
Zone Controller			ABZCA		
Dry Contact (with additional accessory)			PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)		
External Input (1 point)			○		
Wi-Fi			PWFMD200		

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

Fresh Outdoor Air Supply

The LG Fresh Air Intake Unit (FAU) is the alternative solution for ventilation, which supplies the fresh outdoor air indoors as well as and simultaneously cools and heats the air inside. It means the indoor space can have positive air pressure consistently, which can block cold, hot or contaminated air from outside. This allows the indoor space to have consistent positive air pressure blocking cold air.

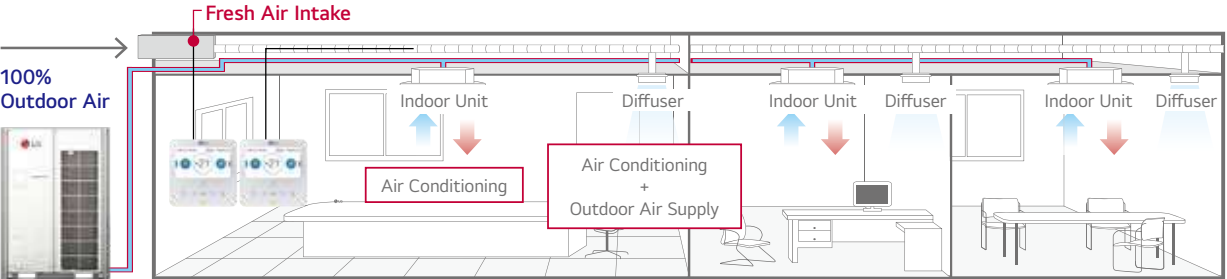


MULTI V i Outdoor unit

Economic Operation


Natural outdoor air is utilized as seasons change for cost efficiency.

Spring Season

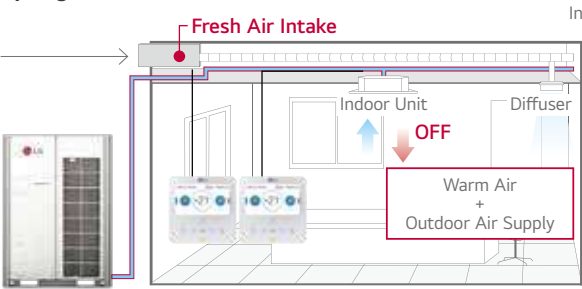


MULTI V i Outdoor unit

Autumn Season

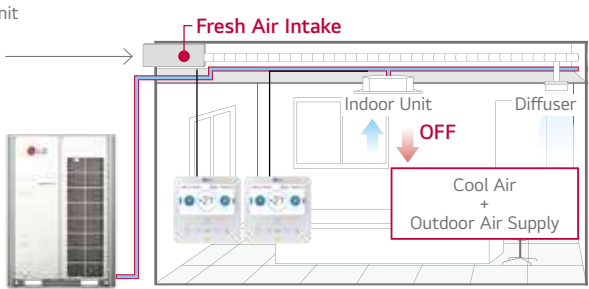

MULTI V i Outdoor unit

Installation Scene

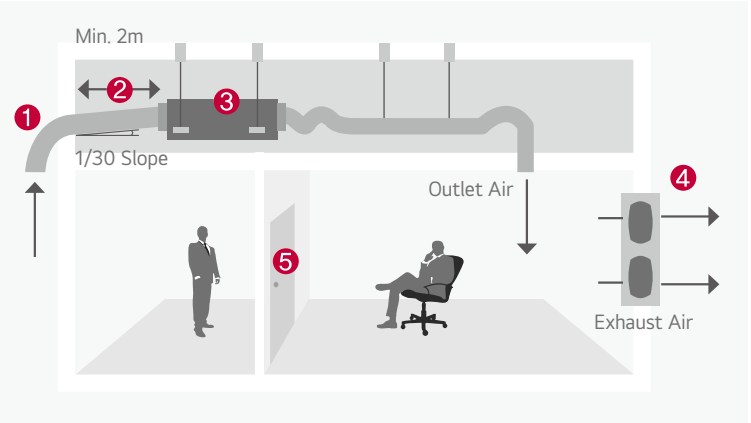

- 1 Inlet Hood
- 2 Intake Air Duct
- 3 Fresh Air Intake Unit
- 4 Exhaust Fan
- 5 Door

ARNU76GB8Z4 / ARNU96GB8Z4



MODEL		UNIT	ARNU76GB8Z4	ARNU96GB8Z4
Cooling Capacity		kW	22.4	28.0
Heating Capacity		kW	21.4	26.7
Power Input (H / M / L)	Nominal	W	230 / 200 / 200	360 / 230 / 230
Dimensions (W x H x D)	Body	mm	1,562 x 460 x 688	1,562 x 460 x 688
	Shipping	mm	1,806 x 537 x 825	1,806 x 537 x 825
Fan	Type	-	Sirocco Fan	Sirocco Fan
	Motor Output x Number	W x No.	375 x 1	375 x 1
	Air Flow Rate (H / M / L) (High Mode-Factory Set)	m³/min	23.7 / 13.2 / 13.2	35.7 / 23.7 / 23.7
	External Static Pressure	mmAq (Pa)	22 (216)	22 (216)
	Motor Type	-	BLDC	BLDC
Air Filter		-	Long Life Filter	Long Life Filter
Pipe Connections	Liquid Side	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø19.05 (3/4)	Ø22.2 (7/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)
Weight	Body	kg	73.0	73.0
Sound Pressure Levels (H / M / L)		dB(A)	45 / 43 / 43	47 / 45 / 45
Sound Power Levels (H / M / L)		dB(A)	70 / 67 / 67	72 / 70 / 70
Power Supply		V / Ø / Hz	220-240 / 1 / 50	220-240 / 1 / 50
Transmission Cable		mm²	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

Note : 1. Performance tested under EN14511
2. Capacities are based on the following conditions
- Cooling : Indoor temp. 27℃ (80.6℉) DB / 19℃ (66.2℉) WB, Outdoor temp. 35℃ (95℉) DB / 24℃ (75.2℉) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20℃ (68℉) DB / 15℃ (59℉) WB, Outdoor temp. 7℃ (44.6℉) DB / 6℃ (42.8℉) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification

⚠ CAUTION

1. Operation range (Cooling : 5℃ ~ 43℃, Heating : -5℃ ~ 43℃) 2. Installation of exhaust fan is recommended for a sealed room. 3. Indoor Unit Connection

NO	CONNECTION CONDITION	COMBINATION
1	Fresh air intake units only are connected with outdoor units	1) The total capacity of fresh air intake unit should be 50 ~ 100% of outdoor unit. 2) The max quantity of fresh air intake is 4 units.
2	Mixture connection with general indoor unit and fresh intake units	1) The total capacity of indoor units (Standard Indoor Unit + Fresh Air Intake Unit) should be 50 ~ 100% of outdoor unit. 2) The total capacity of fresh air intake unit should be less than 30% of the total capacity of indoor units.

Accessories

CHASSIS	ARNU76GB8Z4	ARNU96GB8Z4
Drain Pump		○
Cassette Cover		-
Refrigerant Leak Detector		PRLDNVS0 (R410A)
EEV Kit		-
Multi-tenant Power Module		PINPMB001
Robot Cleaner		-
Pre Filter (Washable)		○
Ion Generator		-
CO ₂ Sensor		-
Ventilation Kit		-
IR Receiver		PWLRVN000
Zone Controller		-
Dry Contact (with additional accessory)		PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)
External Input (1 point)		○
Wi-Fi		PWFMD200

※ ○ : Applied, - : Not applied
Option : Refer to model name in table



Features & Benefits

- Modern design with V-shape and black vane
- Powerful air speed and volume can reach up to 15m

Key Applications

- Retail
- Restaurant
- Shop

CEILINGS		CEILING SUSPENDED
Smart	Wi-Fi	○
Fast Cooling & Heating	Jet Cool	○
Comfort	Sleep mode	○
	Timer (On / Off)	○
	Timer (Weekly)	○
	Two thermistor control	○
	Group control	○


※ ○: Applied, - : Not applied

Wi-Fi Control

Access your air conditioner anytime and from anywhere.

ThinQ

Search "ThinQ" on Google market or the App Store to download the app.

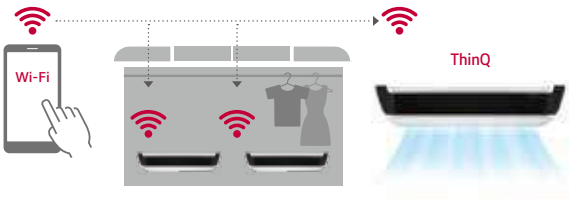

Easy Registration and Log-in

Follow the easy set-up steps that will activate ThinQ's impressive feature.



※ For our policy of continuous ThinQ App improvement, specification, design and features are subject to change without prior notice.

Differentiated Design

Modern, elegant design with V-shape and black vane is appropriate for any commercial space. It received the iF Design Award.




Powerful Cooling & Heating

High ceiling mode provides powerful cooling and heating up to 4.2m in height from floor, 15m away from ceiling.



One Touch & 2 Piece Filter

Easy in / out filter structure as well as a simplified two-piece filter, which slides out for easy cleaning and maintenance.

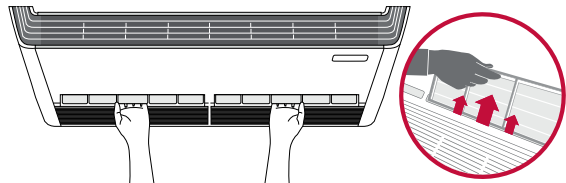

One Touch Filter

Two Thermistors Control

Users can purchase a wired remote controller that includes a second thermistor, allowing for temperature checks from multiple locations.



ARNU18GV1A4 / ARNU24GV1A4



MODEL		UNIT	ARNU18GV1A4	ARNU24GV1A4
Cooling Capacity		kW	5.6	7.1
Heating Capacity		kW	6.3	8.0
Power Input (H / M / L)	Nominal	W	23 / 20 / 17	25 / 21 / 17
Exterior Color		-	Morning Fog	Morning Fog
RAL Code		-	RAL 9001	RAL 9001
Dimensions (W x H x D)	Body	mm	1,200 x 235 x 690	1,200 x 235 x 690
	Shipping	mm	1,315 x 320 x 772	1,315 x 320 x 772
	Type	-	Cross Flow Fan	Cross Flow Fan
Fan	Motor Output x Number	W x No.	85.9 x 1	85.9 x 1
	Air Flow Rate (H / M / L)	m³/min	13.5 / 12.5 / 12.0	14.0 / 13.0 / 12.0
	Motor Type	-	BLDC	BLDC
Air Filter		-	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø16 (5/8)	Ø16 (5/8)
Weight		kg	29.0	29.0
Sound Pressure Levels (H / M / L)		dB(A)	36 / 34 / 33	37 / 35 / 33
Sound Power Levels (H / M / L)		dB(A)	61 / 59 / 56	62 / 59 / 56
Power Supply		V / Ø / Hz	220-240 / 1 / 50	220-240 / 1 / 50
Transmission Cable		mm² x cores	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

Note : 1. Performance tested under EN14511
2. Capacities are based on the following conditions
- Cooling : Indoor temp. 27℃ (80.6℉) DB / 19℃ (66.2℉) WB, Outdoor temp. 35℃ (95℉) DB / 24℃ (75.2℉) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20℃ (68℉) DB / 15℃ (59℉) WB, Outdoor temp. 7℃ (44.6℉) DB / 6℃ (42.8℉) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification

Accessories

CHASSIS	ARNU18GV1A4	ARNU24GV1A4
Drain Pump	-	-
Cassette Cover	-	-
Refrigerant Leak Detector	PRLDNVS0 (R410A), PLDRNV1S (R32)	
EEV Kit	-	-
Multi-tenant Power Module	PINPMB001	
Robot Cleaner	-	-
Pre Filter (Washable)	○	
Ion Generator	-	-
CO ₂ Sensor	-	-
Ventilation Kit	-	-
IR Receiver	-	-
Zone Controller	-	-
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 point)	○	
Wi-Fi	PWFMD200	

※ ○ : Applied, - : Not Applied
Option: Refer to model name in table

ARNU36GV2A4 / ARNU48GV2A4



MODEL		UNIT	ARNU36GV2A4	ARNU48GV2A4
Cooling Capacity		kW	10.6	14.1
Heating Capacity		kW	11.9	15.9
Power Input (H / M / L)	Nominal	W	84 / 77 / 66	91 / 79 / 66
Exterior Color		-	Morning Fog	Morning Fog
RAL Code		-	RAL 9001	RAL 9001
Dimensions (W x H x D)	Body	mm	1,600 x 235 x 690	1,600 x 235 x 690
	Shipping	mm	1,715 x 320 x 772	1,715 x 320 x 772
	Type	-	Cross Flow Fan	Cross Flow Fan
Fan	Motor Output x Number	W x No.	125 x 1	125 x 1
	Air Flow Rate (H / M / L)	m³/min	27.0 / 24.0 / 20.0	29.0 / 24.0 / 20.0
	Motor Type	-	BLDC	BLDC
Air Filter		-	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø16 (5/8)	Ø16 (5/8)
Weight		kg	37.0	37.0
Sound Pressure Levels (H / M / L)		dB(A)	45 / 44 / 40.5	47 / 44 / 40.5
Sound Power Levels (H / M / L)		dB(A)	68 / 66 / 64	68 / 67 / 66
Power Supply		V / Ø / Hz	220-240 / 1 / 50	220-240 / 1 / 50
Transmission Cable		mm² x cores	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

Note : 1. Performance tested under EN14511
2. Capacities are based on the following conditions
- Cooling : Indoor temp. 27℃ (80.6℉) DB / 19℃ (66.2℉) WB, Outdoor temp. 35℃ (95℉) DB / 24℃ (75.2℉) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20℃ (68℉) DB / 15℃ (59℉) WB, Outdoor temp. 7℃ (44.6℉) DB / 6℃ (42.8℉) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification

Accessories

CHASSIS	ARNU36GV2A4	ARNU48GV2A4
Drain Pump	-	-
Cassette Cover	-	-
Refrigerant Leak Detector	PRLDNVS0 (R410A), PLDRNV1S (R32)	
EEV Kit	-	-
Multi-tenant Power Module	PINPMB001	
Robot Cleaner	-	-
Pre Filter (Washable)	○	
Ion Generator	-	-
CO ₂ Sensor	-	-
Ventilation Kit	-	-
IR Receiver	-	-
Zone Controller	-	-
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 point)	○	
Wi-Fi	PWFMD200	

※ ○ : Applied, - : Not Applied
Option: Refer to model name in table



Features & Benefits

- 6 Way flexible piping
- Cold draft window protection
- Condensation protection

Key Applications

- Residential building
- Historical building
- Hotel

FLOOR STANDING		CONSOLE	FLOOR STANDING
Smart	Wi-Fi	○	○
Energy Efficiency	Jet Cool	-	○
Health	Ionizer	○	-
Fast Cooling & Heating	Jet Cool	○	-
	Sleep Mode	○	○
Comfort	Timer (On / Off)	○	○
	Timer (Weekly)	○	○
	Two Thermistor Control	○	○
	Group Control	○	○


※ ○: Applied, -: Not applied

Wi-Fi Control

Access your air conditioner anytime and from anywhere.

ThinQ

Search "ThinQ" on Google market or the App Store to download the app.

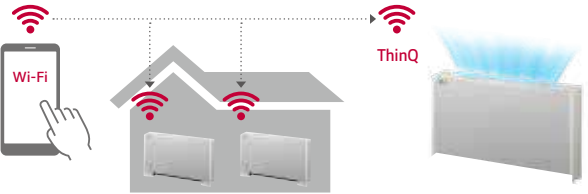


※ For our policy of continuous ThinQ App improvement, specification, design and features are subject to change without prior notice.


Air Flow Direction Change

During the cooling operation, the vane adjusts upwards to direct the air flow towards the ceiling. When heating, the vane directs the warm air downwards to balance the room temperature.


Cooling

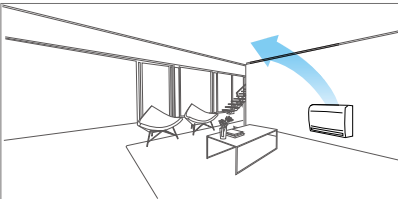

Heating (Normal)

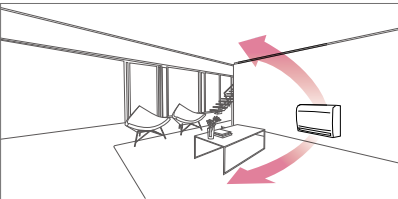

Heating (Option)

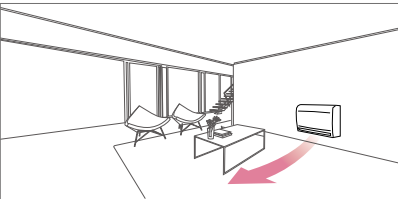


Cold Draft Protection

The console protects cold draft from windows to provide comfortable environment.




5-Step Vane Control

There are 5 different stages to control air flow direction.

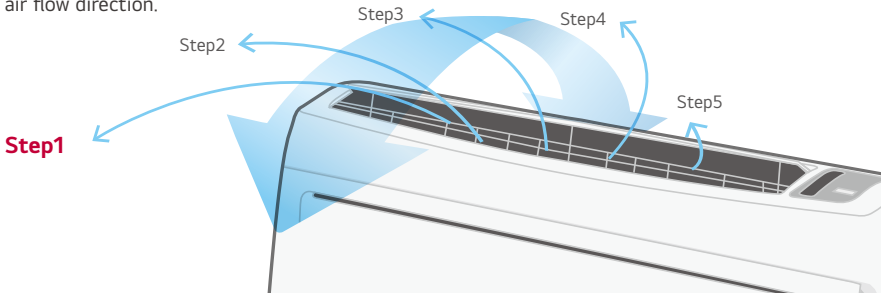

6 Way Flexible Piping


It is possible to install and connect the outdoor unit in 6 different ways. (Right Side, Right Back, Right Floor, Left Side, Left Back, Left Floor)




Protect Cold Draft

The floor standing unit protects cold draft from coming from the window, preventing condensation.

Without Floor Standing

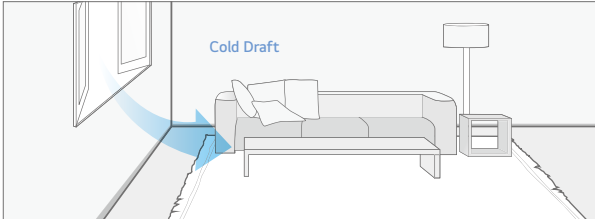


With Floor Standing

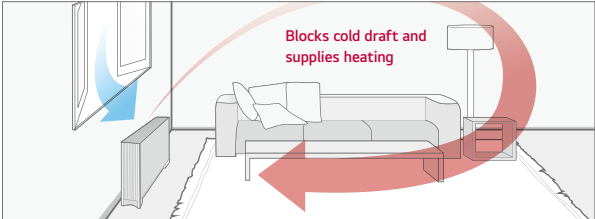

3 Way Flexible Piping


It is possible to install and connect the outdoor unit in 3 different ways. (Side, Back, Floor)

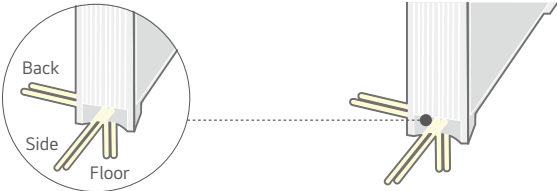


Sliding Type Filter

Easy maintenance and extended product life with sliding type filter.

Sliding Type



Easy Cleaning

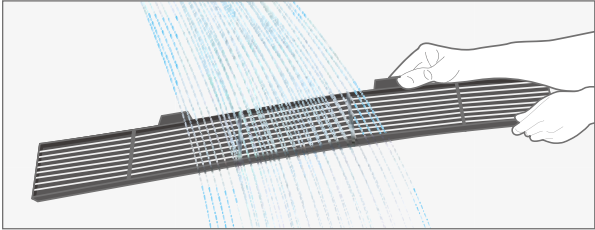

ARNU07GQAA4 / ARNU09GQAA4



MODEL		UNIT	ARNU07GQAA4	ARNU09GQAA4
Cooling Capacity		kW	2.2	2.8
Heating Capacity		kW	2.5	3.2
Power Input (H / M / L)		Nominal W	15 / 12 / 10	15 / 12 / 10
Exterior Color		-	Morning Fog	Morning Fog
RAL Code		-	RAL 9001	RAL 9001
Dimensions (W x H x D)	Body	mm	700 x 600 x 210	700 x 600 x 210
	Shipping	mm	775 x 662 x 284	775 x 662 x 284
Fan	Type	-	Turbo Fan	Turbo Fan
	Motor Output x Number	W x No.	48 x 1	48 x 1
	Air Flow Rate (H / M / L)	m³/min	6.7 / 5.9 / 4.8	6.7 / 5.9 / 4.8
	Motor Type	-	BLDC	BLDC
Air Filter		-	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø12 (15/32)	Ø12 (15/32)
Weight		kg	14.0	14.0
Sound Pressure Levels (H / M / L)		dB(A)	37 / 34 / 28	37 / 34 / 28
Sound Power Levels (H / M / L)		dB(A)	53 / 50 / 44	53 / 50 / 44
Power Supply		V / Ø / Hz	220-240 / 1 / 50	220-240 / 1 / 50
Transmission Cable		mm²	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

Note :
1. Performance tested under EN14511
2. Capacities are based on the following conditions
- Cooling : Indoor temp. 27℃ (80.6℉) DB / 19℃ (66.2℉) WB, Outdoor temp. 35℃ (95℉) DB / 24℃ (75.2℉) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20℃ (68℉) DB / 15℃ (59℉) WB, Outdoor temp. 7℃ (44.6℉) DB / 6℃ (42.8℉) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification

Accessories

CHASSIS	ARNU07GQAA4	ARNU09GQAA4
Drain Pump	-	-
Cassette Cover	-	-
Refrigerant Leak Detector	PRLDNVS0 (R410A), PLDRNV1S (R32)	
EEV Kit	PRGK024A0	
Multi-tenant Power Module	PINPMB001	
Robot Cleaner	-	-
Pre Filter (Washable)	○	
Ion Generator	○	
CO ₂ Sensor	-	
Ventilation Kit	-	
IR Receiver	-	
Zone Controller	-	
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 point)	○	
Wi-Fi	PWFMDD200	

※ ○ : Applied, - : Not Applied
Option: Refer to model name in table

ARNU12GQAA4 / ARNU15GQAA4



MODEL		UNIT	ARNU12GQAA4	ARNU15GQAA4
Cooling Capacity		kW	3.6	4.5
Heating Capacity		kW	4.0	5.0
Power Input (H / M / L)	Nominal	W	18 / 15 / 13	24 / 19 / 17
Exterior Color		-	Morning Fog	Morning Fog
RAL Code		-	RAL 9001	RAL 9001
Dimensions (W x H x D)	Body	mm	700 x 600 x 210	700 x 600 x 210
	Shipping	mm	775 x 662 x 284	775 x 662 x 284
Fan	Type	-	Turbo Fan	Turbo Fan
	Motor Output x Number	W x No.	48 x 1	48 x 1
	Air Flow Rate (H / M / L)	m³/min	7.5 / 5.9 / 4.8	8.7 / 6.7 / 5.9
	Motor Type	-	BLDC	BLDC
Air Filter		-	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø12 (15/32)	Ø12 (15/32)
Weight	Body	kg	14.0	14.0
Sound Pressure Levels (H / M / L)		dB(A)	39 / 34 / 28	42 / 37 / 31
Sound Power Levels (H / M / L)		dB(A)	56 / 50 / 44	58 / 53 / 50
Power Supply		V / Ø / Hz	220-240 / 1 / 50	220-240 / 1 / 50
Transmission Cable		mm²	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

Note :
1. Performance tested under EN14511
2. Capacities are based on the following conditions
- Cooling : Indoor temp. 27℃ (80.6°F) DB / 19℃ (66.2°F) WB, Outdoor temp. 35℃ (95°F) DB / 24℃ (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20℃ (68°F) DB / 15℃ (59°F) WB, Outdoor temp. 7℃ (44.6°F) DB / 6℃ (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification

Accessories

CHASSIS	ARNU12GQAA4	ARNU15GQAA4
Drain Pump	-	-
Cassette Cover	-	-
Refrigerant Leak Detector	PRLDNVS0 (R410A), PLDRNV1S (R32)	
EEV Kit	PRGK024A0	
Multi-tenant Power Module	PINPMB001	
Robot Cleaner	-	
Pre Filter (Washable)	○	
Ion Generator	○	
CO ₂ Sensor	-	
Ventilation Kit	-	
IR Receiver	-	
Zone Controller	-	
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 point)	○	
Wi-Fi	PWFMD200	

※ ○ : Applied, - : Not Applied
Option: Refer to model name in table

ARNU07GCEA4 / ARNU09GCEA4
ARNU12GCEA4 / ARNU15GCEA4
ARNU18GCFA4 / ARNU24GCFA4



※ A : Floor Standing with case

MODEL		UNIT	ARNU07GCEA4	ARNU09GCEA4	ARNU12GCEA4	ARNU15GCEA4	ARNU18GCFA4	ARNU24GCFA4
Cooling Capacity		kW	2.2	2.8	3.6	4.5	5.6	7.1
Heating Capacity		kW	2.5	3.2	4.0	5.0	6.3	8.0
Power Input (H / M / L)	Nominal	W	24 / 17 / 14	30 / 24 / 17	36 / 30 / 24	44 / 35 / 28	54 / 41 / 29	84 / 54 / 41
Exterior Color		-	Morning Fog	Morning Fog	Morning Fog	Morning Fog	Morning Fog	Morning Fog
RAL Code		-	RAL 9001	RAL 9001	RAL 9001	RAL 9001	RAL 9001	RAL 9001
Dimensions (W x H x D)	Body	mm	1,067 x 635 x 203	1,067 x 635 x 203	1,067 x 635 x 203	1,067 x 635 x 203	1,345 x 635 x 203	1,345 x 635 x 203
	Shipping	mm	1,154 x 705 x 289	1,154 x 705 x 289	1,154 x 705 x 289	1,154 x 705 x 289	1,432 x 705 x 289	1,432 x 705 x 289
Fan	Type	-	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan
	Motor Output x Number	W x No.	19 x 1, 5 x 1	19 x 1, 5 x 1	19 x 1, 5 x 1	19 x 1, 5 x 1	19 x 2	19 x 2
	Air Flow Rate (H / M / L)	m³/min	8.5 / 7.5 / 6.5	9.5 / 8.5 / 7.5	10.5 / 9.5 / 8.5	11.5 / 10.0 / 9.5	16.0 / 14.0 / 12.0	18.0 / 16.0 / 14.0
	Motor Type	-	BLDC	BLDC	BLDC	BLDC	BLDC	BLDC
Air Filter		-	Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø12 (15/32)	Ø12 (15/32)	Ø12 (15/32)	Ø12 (15/32)	Ø12 (15/32)	Ø12 (15/32)
Weight	Body	kg	27.0	27.0	27.0	27.0	34.0	34.0
Sound Pressure Levels (H / M / L)		dB(A)	35 / 33 / 31	36 / 34 / 32	37 / 35 / 33	38 / 37 / 35	40 / 37 / 34	43 / 40 / 37
Sound Power Levels (H / M / L)		dB(A)	52 / 47 / 43	54 / 51 / 47	54 / 51 / 50	55 / 54 / 51	57 / 54 / 50	61 / 57 / 54
Power Supply		V / Ø / Hz	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50
Transmission Cable		mm²	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

Note :
1. Performance tested under EN14511
2. Capacities are based on the following conditions
- Cooling : Indoor temp. 27℃ (80.6°F) DB / 19℃ (66.2°F) WB, Outdoor temp. 35℃ (95°F) DB / 24℃ (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20℃ (68°F) DB / 15℃ (59°F) WB, Outdoor temp. 7℃ (44.6°F) DB / 6℃ (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification

Accessories

CHASSIS	ARNU07GCEA4	ARNU09GCEA4	ARNU12GCEA4	ARNU15GCEA4	ARNU18GCFA4	ARNU24GCFA4
Drain Pump		-			-	
Cassette Cover		-			-	
Refrigerant Leak Detector		PRLDNVS0 (R410A), PLDRNV1S (R32)			PRLDNVS0 (R410A), PLDRNV1S (R32)	
EEV Kit		PRGK024A0			-	
Multi-tenant Power Module		PINPMB001			PINPMB001	
Robot Cleaner		-			-	
Pre Filter (Washable)		○			○	
Ion Generator		-			-	
CO ₂ Sensor		-			-	
Ventilation Kit		-			-	
IR Receiver		PWLRVN000			PWLRVN000	
Zone Controller		-			-	
Dry Contact (with additional accessory)		PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)				
External Input (1 point)		○			○	
Wi-Fi		PWFMD200			PWFMD200	

※ ○ : Applied, - : Not Applied
Option: Refer to model name in table

ARNU07GCEU4 / ARNU09GCEU4
ARNU12GCEU4 / ARNU15GCEU4
ARNU18GCFU4 / ARNU24GCFU4



※ U : Floor Standing without case

MODEL		UNIT	ARNU07GCEU4	ARNU09GCEU4	ARNU12GCEU4	ARNU15GCEU4	ARNU18GCFU4	ARNU24GCFU4
Cooling Capacity		kW	2.2	2.8	3.6	4.5	5.6	7.1
Heating Capacity		kW	2.5	3.2	4.0	5.0	6.3	8.0
Power Input (H / M / L)	Nominal	W	24 / 17 / 14	30 / 24 / 17	36 / 30 / 24	44 / 35 / 28	54 / 41 / 29	84 / 54 / 41
Dimensions (W x H x D)	Body	mm	978 x 639 x 190	978 x 639 x 190	978 x 639 x 190	978 x 639 x 190	1,256 x 639 x 190	1,256 x 639 x 190
	Shipping	mm	1,055 x 702 x 260	1,055 x 702 x 260	1,055 x 702 x 260	1,055 x 702 x 260	1,333 x 702 x 260	1,333 x 702 x 260
Fan	Type	-	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan
	Motor Output x Number	W x No.	19 x 1, 5 x 1	19 x 1, 5 x 1	19 x 1, 5 x 1	19 x 1, 5 x 1	19 x 2	19 x 2
	Air Flow Rate (H / M / L)	m³/min	8.5 / 7.5 / 6.5	9.5 / 8.5 / 7.5	10.5 / 9.5 / 8.5	11.5 / 10.0 / 9.5	16.0 / 14.0 / 12.0	18.0 / 16.0 / 14.0
	Motor Type	-	BLDC	BLDC	BLDC	BLDC	BLDC	BLDC
Air Filter		-	Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø12 (15/32)	Ø12 (15/32)	Ø12 (15/32)	Ø12 (15/32)	Ø12 (15/32)	Ø12 (15/32)
Weight	Body	kg	21.0	21.0	21.0	21.0	25.0	25.0
Sound Pressure Levels (H / M / L)		dB(A)	35 / 33 / 31	36 / 34 / 32	37 / 35 / 33	38 / 37 / 35	40 / 37 / 34	43 / 40 / 37
Sound Power Levels (H / M / L)		dB(A)	52 / 47 / 43	54 / 51 / 47	54 / 51 / 50	55 / 54 / 51	59 / 57 / 53	63 / 59 / 57
Power Supply		V / Ø / Hz	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50
Transmission Cable		mm²	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C

Note :
1. Performance tested under EN14511
2. Capacities are based on the following conditions
- Cooling : Indoor temp. 27℃ (80.6°F) DB / 19℃ (66.2°F) WB, Outdoor temp. 35℃ (95°F) DB / 24℃ (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating : Indoor temp. 20℃ (68°F) DB / 15℃ (59°F) WB, Outdoor temp. 7℃ (44.6°F) DB / 6℃ (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification

Accessories

CHASSIS	ARNU07GCEU4	ARNU09GCEU4	ARNU12GCEU4	ARNU15GCEU4	ARNU18GCFU4	ARNU24GCFU4
Drain Pump		-			-	
Cassette Cover		-			-	
Refrigerant Leak Detector		PRLDNVS0 (R410A), PLDRNV1S (R32)			PRLDNVS0 (R410A), PLDRNV1S (R32)	
EEV Kit		PRGK024A0			-	
Multi-tenant Power Module		PINPMB001			PINPMB001	
Robot Cleaner		-			-	
Pre Filter (Washable)		○			○	
Ion Generator		-			-	
CO ₂ Sensor		-			-	
Ventilation Kit		-			-	
IR Receiver		PWLRVN000			PWLRVN000	
Zone Controller		-			-	
Dry Contact (with additional accessory)		PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)				
External Input (1 point)		○			○	
Wi-Fi		PWFMD200			PWFMD200	

※ ○ : Applied, - : Not Applied
Option: Refer to model name in table



Features & Benefits

- Powerful air speed and volume means the air flow can reach up to 30m away from the air conditioner

Key Applications

- Factory
- Retail
- Shop
- Office
- Restaurant

FLOOR STANDING (PAC)		FLOOR STANDING (PAC)	
Smart	Wi-Fi*		○
Energy Efficiency	Jet Cool		○
Health	Ionizer		-
Fast Cooling & Heating	Jet Cool		○
Comfort	Sleep Mode		○
	Timer (On / Off)		○
	Timer (Weekly)		-
	Two Thermistor Control		○
	Group Control		○

※ ○: Applied, - : Not applied
* Extra module is necessary for Wi-fi (module: PWFMD200)


Airflow to Distant Spaces

The new Floor Standing Unit can blow both cooled and heated air into a space as far as 30m away.



Easy Filter Cleaning


Standing on the floor, customers can easily separate the filter from the indoor unit. They can also easily clean the filter with a vacuum cleaner or water.

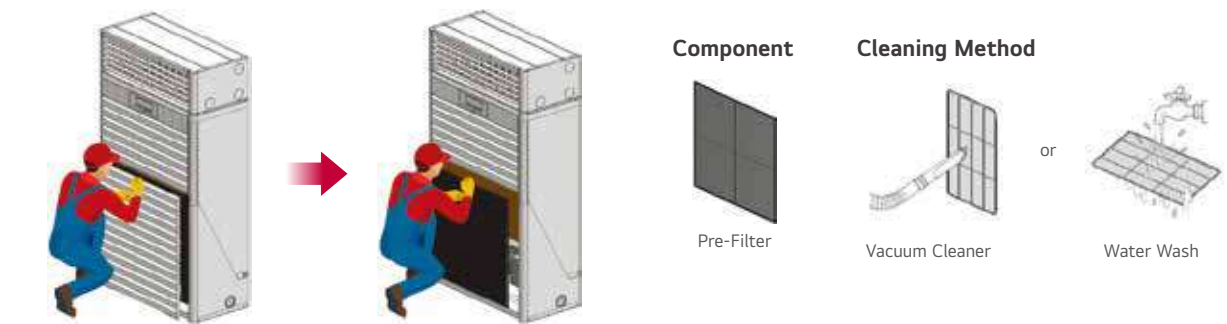

※ You may need professional help to clean the filter.

Wi-Fi Control with LG ThinQ

Customers can monitor and control the new Floor Standing Unit anytime, anywhere through LG ThinQ.

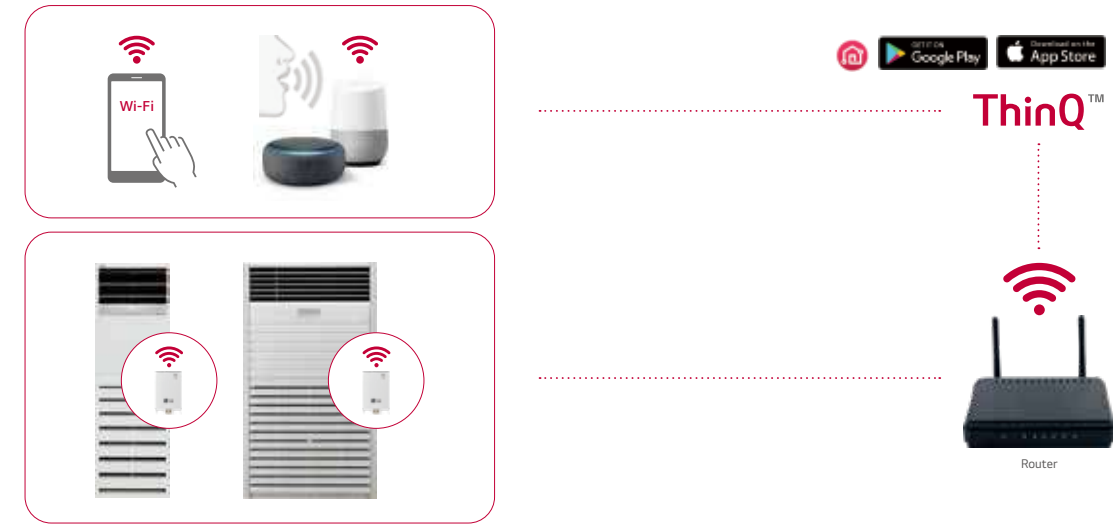

※ The Wi-Fi modem is separately purchased as an accessory.
※ The router and smart speakers are purchased separately.
※ The Functions may vary depending on the indoor unit and region.

ARNU48GPTA4 / ARNU96GPFA4



MODEL		UNIT	ARNU48GPTA4	ARNU96GPFA4
Cooling Capacity		kW	14.1	28.0
Heating Capacity		kW	15.9	31.5
Power Input	Cooling (SH / H / M / L)	W	260 / 190 / 140 / 110	400 / 280 / - / 180
	Heating (SH / H / M / L)	W	260 / 190 / 140 / 110	400 / 280 / - / 180
FLA (Full Load Ampere)		A	1.3	2.3
Casing		-	Galvanized Steel Plate	
Dimensions (W×H×D)	Body	mm	590 × 1,840 × 440	1,050 × 1,880 × 495
	Rows × Columns ×FPI	-	3 x 38 x 19	3 x 40 x 19
Coil	Face Area	m²	0.39	0.77
	Type	-	Blower Fan	Blower Fan
Fan	Motor Output x Number	W	224 x 1	700 x 1
	Air Flow Rate (SH / H / M / L) (Standard Mode)	m³ / min	37 / 33 / 28 / 24	68 / 61 / - / 50
	Drive	-	Direct	
	Motor Type	-	BLDC	
	Temperature Control	-	Microprocessor, Thermostat for cooling and heating	
Sound Absorbing Thermal Insulation Material		-	Foamed Polystyrene	
Air Filter		-	-	-
Safety Device		-	Fuse	
Pipe Connections	Liquid Side	mm (inch)	9.52 (3/8)	9.52 (3/8)
	Gas Side	mm (inch)	15.88 (5/8)	22.2 (7/8)
	Drain(ID)	mm	19	22
Net Weight		kg (lbs)	48 (105.8)	103 (227.0)
Sound Pressure Level (SH / H / M / L)		dB (A)	54 / 51 / 49 / 45	60 / 57 / - / 53
Power Supply	V / Ø / Hz		220 / 1 / 60	220 / 1 / 60
	V / Ø / Hz		220-240 / 1 / 50	220-240 / 1 / 50
Refrigerant Control		-	EEV	
Communication Cable		mm² (VCTF-SB)	1.0 ~ 1.5 x 2C	1.0 ~ 1.5 x 2C